


## WPRAA 120

wide-span cable tray attachment branch, height = 120 mm

Formed components must be supported at all sides.

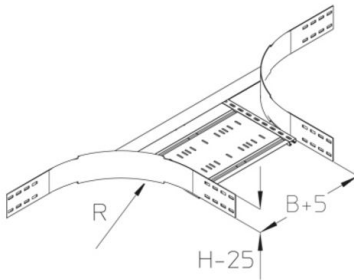

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product        | H   | B      | R      | G        |
|----------------|---|--------|--------|----------|
| WPRAA 120-20F  | 120 mm                                      | 200 mm | 450 mm | 9,28 kg  |
| incl.:         |   |        |        |          |
| 8x FRSV 10X20F | round-head screw with short square, DIN 603 |        |        |          |
| 8x SEM 10F     | hexagon-nut, DIN 934                        |        |        |          |
| 8x US 10X21F   | washer, DIN EN ISO 7089                     |        |        |          |
| WPRAA 120-30F  | 120 mm                                      | 300 mm | 450 mm | 9,76 kg  |
| incl.:         |   |        |        |          |
| 8x FRSV 10X20F | round-head screw with short square, DIN 603 |        |        |          |
| 8x SEM 10F     | hexagon-nut, DIN 934                        |        |        |          |
| 8x US 10X21F   | washer, DIN EN ISO 7089                     |        |        |          |
| WPRAA 120-40F  | 120 mm                                      | 400 mm | 450 mm | 10,23 kg |
| incl.:         |   |        |        |          |
| 8x FRSV 10X20F | round-head screw with short square, DIN 603 |        |        |          |
| 8x SEM 10F     | hexagon-nut, DIN 934                        |        |        |          |
| 8x US 10X21F   | washer, DIN EN ISO 7089                     |        |        |          |
| WPRAA 120-50F  | 120 mm                                      | 500 mm | 450 mm | 10,71 kg |
| incl.:         |   |        |        |          |
| 8x FRSV 10X20F | round-head screw with short square, DIN 603 |        |        |          |
| 8x SEM 10F     | hexagon-nut, DIN 934                        |        |        |          |
| 8x US 10X21F   | washer, DIN EN ISO 7089                     |        |        |          |
| WPRAA 120-60F  | 120 mm                                      | 600 mm | 450 mm | 11,45 kg |
| incl.:         |   |        |        |          |
| 8x FRSV 10X20F | round-head screw with short square, DIN 603 |        |        |          |
| 8x SEM 10F     | hexagon-nut, DIN 934                        |        |        |          |
| 8x US 10X21F   | washer, DIN EN ISO 7089                     |        |        |          |



**H:** height  
**B:** width  
**R:** radius  
**G:** weight

## OPTIONAL ACCESSORIES

WPAD, WPTRV 120



UL classified

