


WPRAA 150

wide-span cable tray attachment branch, height = 150 mm

Formed components must be supported at all sides. This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

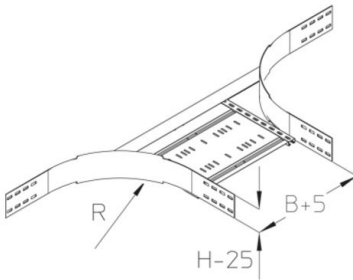

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
WPRAA 150-20F	150 mm	200 mm	450 mm	11,15 kg
incl.:				
8x FRSV 10X20F	round-head screw with short square, DIN 603			
8x SEM 10F	hexagon-nut, DIN 934			
8x US 10X21F	washer, DIN EN ISO 7089			
WPRAA 150-30F	150 mm	300 mm	450 mm	11,63 kg
incl.:				
8x FRSV 10X20F	round-head screw with short square, DIN 603			
8x SEM 10F	hexagon-nut, DIN 934			
8x US 10X21F	washer, DIN EN ISO 7089			
WPRAA 150-40F	150 mm	400 mm	450 mm	12,1 kg
incl.:				
8x FRSV 10X20F	round-head screw with short square, DIN 603			
8x SEM 10F	hexagon-nut, DIN 934			
8x US 10X21F	washer, DIN EN ISO 7089			
WPRAA 150-50F	150 mm	500 mm	450 mm	12,58 kg
incl.:				
8x FRSV 10X20F	round-head screw with short square, DIN 603			
8x SEM 10F	hexagon-nut, DIN 934			
8x US 10X21F	washer, DIN EN ISO 7089			
WPRAA 150-60F	150 mm	600 mm	450 mm	13,31 kg
incl.:				
8x FRSV 10X20F	round-head screw with short square, DIN 603			
8x SEM 10F	hexagon-nut, DIN 934			
8x US 10X21F	washer, DIN EN ISO 7089			



H: height
B: width
R: radius
G: weight

OPTIONAL ACCESSORIES

WPAD, WPTRV 150



UL classified

