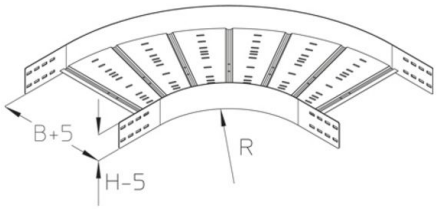

WPRB 150

wide-span cable tray bend, height = 150 mm

wide-span cable tray bend 90º for vertical change of direction with integrated connectors

Formed components must be supported at all sides. This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
WPRB 150-20F	150 mm	200 mm	450 mm	11,51 kg
incl.: 8x KLS 10X20F		clamp fastening set		
WPRB 150-30F	150 mm	300 mm	450 mm	13,15 kg
incl.: 8x KLS 10X20F		clamp fastening set		
WPRB 150-40F	150 mm	400 mm	450 mm	14,86 kg
incl.: 8x KLS 10X20F		clamp fastening set		
WPRB 150-50F	150 mm	500 mm	450 mm	16,71 kg
incl.: 8x KLS 10X20F		clamp fastening set		
WPRB 150-60F	150 mm	600 mm	450 mm	18,68 kg
incl.: 8x KLS 10X20F		clamp fastening set		

H: height
B: width
R: radius
G: weight

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Date of issuance: 27.07.2024. Errors and technical modifications reserved.

OPTIONAL ACCESSORIES

WPBD, EBW, WPTRV 150

UL classified

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Date of issuance: 27.07.2024. Errors and technical modifications reserved.