


WPRK 120

wide-span crossing, height = 120 mm

wide-span cable tray crossing for horizontal change of direction with integrated connectors

Formed components must be supported at all sides.

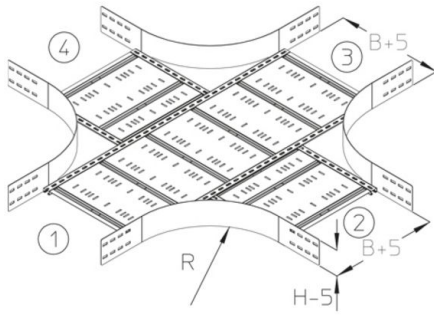

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
WPRK 120-20F	120 mm	200 mm	450 mm	22,81 kg
incl.:				
16x KLS 10X20F		clamp fastening set		
WPRK 120-30F	120 mm	300 mm	450 mm	25,05 kg
incl.:				
16x KLS 10X20F		clamp fastening set		
WPRK 120-40F	120 mm	400 mm	450 mm	27,41 kg
incl.:				
16x KLS 10X20F		clamp fastening set		
WPRK 120-50F	120 mm	500 mm	450 mm	29,98 kg
incl.:				
16x KLS 10X20F		clamp fastening set		
WPRK 120-60F	120 mm	600 mm	450 mm	33,29 kg
incl.:				
16x KLS 10X20F		clamp fastening set		

H: height
B: width
R: radius
G: weight



OPTIONAL ACCESSORIES

WPKD, WPTRV 120



UL classified

