


## WPRK 150

wide-span crossing, height = 150 mm

wide-span cable tray crossing for horizontal change of direction with integrated connectors

Formed components must be supported at all sides.

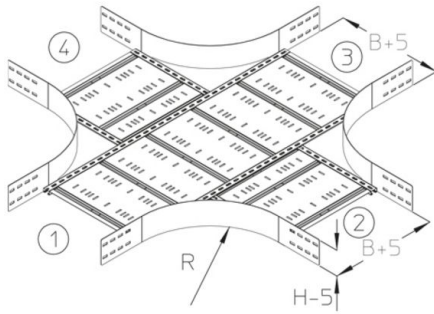

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
WPRK 150-20F	150 mm	200 mm	450 mm	26,54 kg
incl.: 16x KLS 10X20F		clamp fastening set		
WPRK 150-30F	150 mm	300 mm	450 mm	28,78 kg
incl.: 16x KLS 10X20F		clamp fastening set		
WPRK 150-40F	150 mm	400 mm	450 mm	31,14 kg
incl.: 16x KLS 10X20F		clamp fastening set		
WPRK 150-50F	150 mm	500 mm	450 mm	33,71 kg
incl.: 16x KLS 10X20F		clamp fastening set		
WPRK 150-60F	150 mm	600 mm	450 mm	37,02 kg
incl.: 16x KLS 10X20F		clamp fastening set		

**H:** height  
**B:** width  
**R:** radius  
**G:** weight



## OPTIONAL ACCESSORIES

WPKD, WPTRV 150



UL classified

