

WPVV 100

wide-span connector, vertical, height = 95 mm

All other angles up to 90° maximum are to be set above the elongated holes I. This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.


Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	L	G
WPVV 100E	120 mm	253 mm	1,51 kg
incl.:			
10x SEM 10E	hexagon-nut, DIN 934		
8x FRSV 10X20E	round-head screw with short square, DIN 603		
2x SES 10X20E	hexagon head bolt, DIN 933		
1x FS 10E	serrated lock washer		

H: height
L: length
G: weight

DETAILS / APPLICATIONS



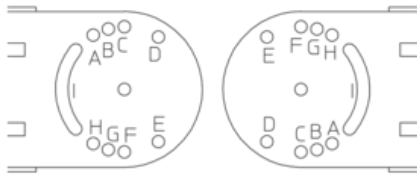

- 15° C + G
- 18° E + B
- 30° A + F
- 45° B + H
- 60° A + H

