


WPVV 120

wide-span connector, vertical, height = 115 mm

All other angles up to 90° maximum are to be set above the elongated holes I. This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	L	G
WPVV 120S	120 mm	253 mm	1,51 kg
incl.:			
8x KLS 10X20		clamp fastening set	
2x SES 10X20		hexagon head bolt, DIN 933	
2x SEM 10		hexagon-nut, DIN 934	
1x FS 10		serrated lock washer	


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	L	G
WPVV 120F	120 mm	253 mm	1,73 kg
incl.:			
8x KLS 10X20F		clamp fastening set	
1x FS 10-304		serrated lock washer	
1x FS 10-316		serrated lock washer	
2x SES 10X20F		hexagon head bolt, DIN 933	
2x SEM 10F		hexagon-nut, DIN 934	
1x FS 10E		serrated lock washer	

H: height
L: length
G: weight



DETAILS / APPLICATIONS

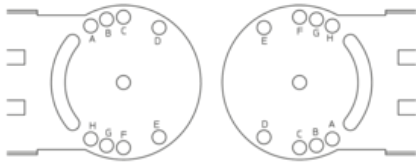

15° C + G
18° E + B
30° A + F
45° B + H
60° A + H

