

## WPVV 150

wide-span connector, vertical, height = 145 mm

All other angles up to 90° maximum are to be set above the elongated holes I. This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	L	G
WPVV 150S	150 mm	377 mm	2,43 kg

incl.:

8x KLS 10X20  
 2x SES 10X20  
 2x SEM 10  
 1x FS 10

clamp fastening set  
 hexagon head bolt, DIN 933  
 hexagon-nut, DIN 934  
 serrated lock washer

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	L	G
WPVV 150F	150 mm	377 mm	2,6 kg

incl.:

8x KLS 10X20F  
 1x FS 10-304  
 1x FS 10-316  
 2x SES 10X20F  
 2x SEM 10F  
 1x FS 10E

clamp fastening set  
 serrated lock washer  
 serrated lock washer  
 hexagon head bolt, DIN 933  
 hexagon-nut, DIN 934  
 serrated lock washer


Stainless steel, according to ASTM 304 / BS 304 S 3



Product	H	L	G
WPVV 150E	150 mm	377 mm	2,43 kg
incl.:			
8x KLS 10X20E		clamp fastening set	
1x FS 10-304		serrated lock washer	
2x SES 10X20-304		hexagon head bolt, DIN 933	
1x FS 10-316		serrated lock washer	
2x SES 10X20E		hexagon head bolt, DIN 933	
2x SEM 10E		hexagon-nut, DIN 934	
1x FS 10E		serrated lock washer	

**H:** height  
**L:** length  
**G:** weight

## DETAILS / APPLICATIONS

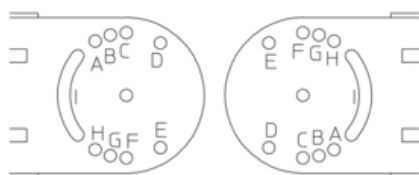

15° C + G  
 18° E + B  
 30° A + F  
 45° B + H  
 60° A + H

