




Rigid Conduits

Protection Tube Systems

374

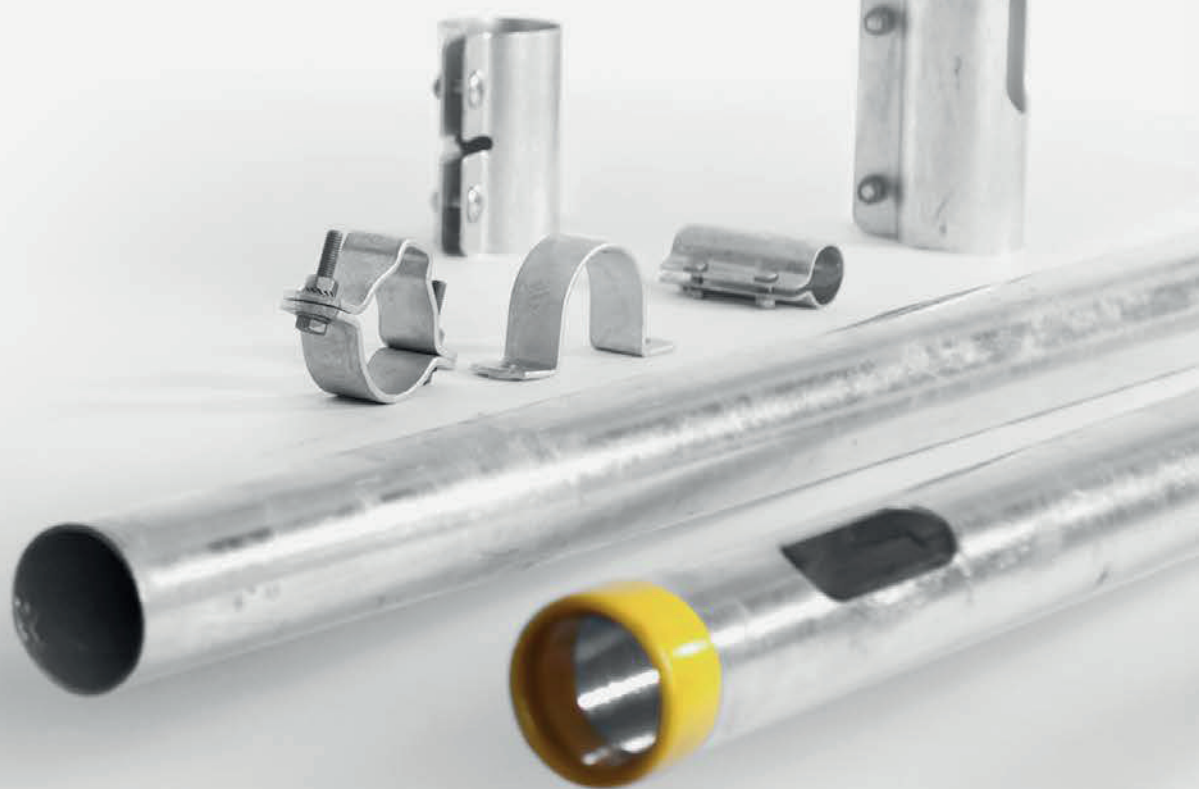

Protection Tube Systems



SR

Protective tube, length = 6000 mm

Article	L mm	t mm	D mm	G kg
Steel, hot-dip galvanised				
SR 30F	6000	1.50	30	6.650
SR 60F	6000	2.00	60	17.400
Stainless steel, acc. to AISI 304 (BS 304S31)				
SR 30E	6000	1.50	30	6.650
SR 60E	6000	2.00	60	17.400

optional accessories

SRM	Clamping sleeve	376
SRML	Slotted sleeve	377
SRF	Foot attachment	381
SRFW	Base bracket	382
SRMP-C	Assembly plate, 270x380 mm	381
SRMP-B	Assembly plate, 175x260 mm	380
SRMP-A	Assembly plate, 165x175 mm	380
SRS-W	Mounting clamp	379
SRS-B	Pipe bracket clamp	380
SRS-A	Anchor clamp	378
SRS-R	Tube clamp	379
SRB 45	Bend, 45°	376
SRB 90	Bend, 90°	375
SRHB	Protective tube holder	378
SRHD	Protective tube holder, swivelling	377
SRK-O	End sleeve as edge protection	382
SRK-G	End cap	383





SRL

Protective tube, slit, length = 6000 mm

Article	L mm	t mm	D mm	G kg
Steel, hot-dip galvanised				
SRL 60F	6000	2.00	60	16.300
Stainless steel, acc. to AISI 304 (BS 304S31)				
SRL 60E	6000	2.00	60	16.300

optional accessories

SRM	Clamping sleeve	376
SRML	Slotted sleeve	377
SRF	Foot attachment	381
SRFW	Base bracket	382
SRMP-C	Assembly plate, 270x380 mm	381
SRMP-B	Assembly plate, 175x260 mm	380
SRMP-A	Assembly plate, 165x175 mm	380
SRS-W	Mounting clamp	379
SRS-B	Pipe bracket clamp	380
SRS-A	Anchor clamp	378
SRS-R	Tube clamp	379
SRB 45	Bend, 45°	376
SRB 90	Bend, 90°	375
SRHB	Protective tube holder	378
SRHD	Protective tube holder, swivelling	377
SRK-O	End sleeve as edge protection	382
SRK-G	End cap	383
SRL-KSR 100	Edge protection ring	383





SRB 90

Bend, 90°

Article	H mm	B mm	t mm	D mm	R mm	W	G kg
Steel, hot-dip galvanised							
SRB 90-30F	185	100	1.50	30	140	90°	0.400
SRB 90-60F	225	100	2.00	60	150	90°	1.300
Stainless steel, acc. to AISI 304 (BS 304S31)							
SRB 90-30E	185	100	1.50	30	140	90°	0.400
SRB 90-60E	225	100	2.00	60	150	90°	1.300

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375





SRB 45

Bend, 45°

Article	H	B	L	t	D	R	W	G
	mm	mm	mm	mm	mm	mm		kg
Steel, hot-dip galvanised								
SRB 45-30F	270	100	6000	1.50	30	140	45°	0.300
SRB 45-60F	350	100	6000	2.00	60	150	45°	1.050
Stainless steel, acc. to AISI 304 (BS 304S31)								
SRB 45-30E	270	100		1.50	30	140	45°	0.300
SRB 45-60E	350	100		2.00	60	150	45°	1.050

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375





SRM

Clamping sleeve

Article	H	t	D	G
	mm	mm	mm	kg
Steel, hot-dip galvanised				
SRM 30F	80	1.50	30	0.150
SRM 60F	115	2.50	60	0.550
Stainless steel, acc. to AISI 304 (BS 304S31)				
SRM 30E	80	1.50	30	0.150
SRM 60E	115	2.50	60	0.550

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375
SRB 45	Bend, 45°	376
SRB 90	Bend, 90°	375





SRML

Slotted sleeve

Article	H mm	t mm	D mm	G kg
Steel, hot-dip galvanised				
SRML 30F	130	1.50	30	0.200
SRML 60F	230	2.50	60	1.050
Stainless steel, acc. to AISI 304 (BS 304S31)				
SRML 30E	130	1.50	30	0.200
SRML 60E	230	2.50	60	1.050

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375
SRB 45	Bend, 45°	376
SRB 90	Bend, 90°	375





SRHD

Protective tube holder, swivelling

Article	H mm	B mm	L mm	t mm	D mm	G kg
Steel, hot-dip galvanised						
SRHD 30F	62	15	80	1.50	30	0.700
SRHD 60F	102	15	115	2.00	60	1.200
Stainless steel, acc. to AISI 304 (BS 304S31)						
SRHD 30E	62	15	80	1.50	30	0.700
SRHD 60E	102	15	115	2.00	60	1.200

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375
SRB 45	Bend, 45°	376
SRB 90	Bend, 90°	375





SRHB

Protective tube holder

Article	B mm	t mm	D mm	G kg
Steel, hot-dip galvanised				
SRHB 30F	6	6.00	31	0.520
SRHB 60F	10	10.00	61	0.620
Stainless steel, acc. to AISI 304 (BS 304S31)				
SRHB 30E	6	6.00	31	0.520
SRHB 60E	10	8.00	61	0.620

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375
SRB 45	Bend, 45°	376
SRB 90	Bend, 90°	375





SRS-A

Anchor clamp

Article	L mm	t mm	D mm	G kg
Steel, hot-dip galvanised				
SRS-A 30F	70	1.50	30	0.060
SRS-A 60F	70	1.50	60	0.080
Stainless steel, acc. to AISI 304 (BS 304S31)				
SRS-A 30E	70	1.50	30	0.060
SRS-A 60E	70	1.50	60	0.080

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375
SRB 45	Bend, 45°	376
SRB 90	Bend, 90°	375





SRS-W

Mounting clamp

Article	t mm	D mm	G kg
Steel, hot-dip galvanised			
SRS-W 30F	4.00	31	0.100
SRS-W 60F	4.00	61	0.320
Stainless steel, acc. to AISI 304 (BS 304S31)			
SRS-W 30E	4.00	31	0.090
SRS-W 60E	4.00	61	0.310

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375
SRB 45	Bend, 45°	376
SRB 90	Bend, 90°	375





SRS-R

Tube clamp

Article	B mm	L mm	t mm	D mm	G kg
Steel, hot-dip galvanised					
SRS-R 30F	25	85	2.50	31	0.060
SRS-R 60F	30	160	4.00	61	0.220
Stainless steel, acc. to AISI 304 (BS 304S31)					
SRS-R 30E	25	85	2.50	31	0.060
SRS-R 60E	30	160	4.00	61	0.220

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375
SRB 45	Bend, 45°	376
SRB 90	Bend, 90°	375





SRS-B

Pipe bracket clamp

Article	t mm	D mm	G kg
Steel, hot-dip galvanised			
SRS-B 60-10F	10.00	61	0.060
Stainless steel, acc. to AISI 304 (BS 304S31)			
SRS-B 30-6E	6.00	31	0.050
SRS-B 60-8E	8.00	61	0.160

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375
SRB 45	Bend, 45°	376
SRB 90	Bend, 90°	375




SRMP-A

Assembly plate, 165x175 mm

Article	H mm	B mm	t mm	D mm	G kg
Steel, hot-dip galvanised					
SRMP-A 30F	175	165	3.00	30	0.580
SRMP-A 60F	175	165	3.00	60	0.600
Stainless steel, acc. to AISI 304 (BS 304S31)					
SRMP-A 30E	175	165	3.00	30	0.580
SRMP-A 60E	175	165	3.00	60	0.600

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375




SRMP-B

Assembly plate, 175x260 mm

Article	H mm	B mm	t mm	D mm	G kg
Steel, hot-dip galvanised					
SRMP-B 30F	260	175	3.00	30	1.100
SRMP-B 60F	260	175	3.00	60	1.100
Stainless steel, acc. to AISI 304 (BS 304S31)					
SRMP-B 30E	260	175	3.00	30	1.100
SRMP-B 60E	260	175	3.00	60	1.100

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375




SRMP-C

Assembly plate, 270x380 mm

Article	H mm	B mm	t mm	D mm	G kg
Steel, hot-dip galvanised					
SRMP-C 60F	380	270	3.00	60	2.700
Stainless steel, acc. to AISI 304 (BS 304S31)					
SRMP-C 60E	380	270	3.00	60	2.700

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375





SRF

Foot attachment

Article	H mm	B mm	L mm	t mm	D mm	G kg
Steel, hot-dip galvanised						
SRF 30F	130	40	130	1.50	31	0.280
SRF 60F	230	80	220	2.50	61	1.750
Stainless steel, acc. to AISI 304 (BS 304S31)						
SRF 30E	130	40	130	1.50	31	0.280
SRF 60E	230	80	220	2.50	61	1.750

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375





SRFW

Base bracket

Article	H	B	L	t	G
	mm	mm	mm	mm	kg
Steel, hot-dip galvanised					
SRFW 30F	100	60	200	2.00	0.520
SRFW 60F	200	100	400	3.00	1.950
Stainless steel, acc. to AISI 304 (BS 304S31)					
SRFW 30E	100	60	200	2.00	0.520
SRFW 60E	200	100	400	3.00	1.950

optional accessories

SRS-B	Pipe bracket clamp	380
SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375





SRK-O

End sleeve as edge protection

Article	L	t	D	G
	mm	mm	mm	kg
Polyvinyl chloride				
SRK-O 30	25	2.00	30	0.010
SRK-O 60	25	2.00	60	0.020

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375





SRK-G

End cap

Article	L mm	t mm	D mm	G kg
Polyvinyl chloride				
SRK-G 30	30	2.00	30	0.010
SRK-G 60	35	2.00	60	0.020

optional accessories

SR	Protective tube, length = 6000 mm	374
SRL	Protective tube, slit, length = 6000 mm	375



SRL-KSR 100

Edge protection ring

Article	H mm	B mm	L mm	G kg
Polyvinyl chloride				
SRL-KSR 100	28	2	100	0.016

optional accessories

SRL	Protective tube, slit, length = 6000 mm	375
------------	---	-----

