

Mesh Cable Trays G | Compact overview

G 35

Mesh cable tray in GV, S, F, E

Products	B	A
G 35-10	116	29
G 35-15	166	43
G 35-20	216	58
G 35-30	316	87

G 50

Mesh cable tray in GV, S, F, E, E4

Products	B	A
G 50-06	76	25
G 50-10	116	45
G 50-15	166	67
G 50-20	216	90
G 50-30	316	135
G 50-40	418	176
G 50-50	518	220
G 50-60	618	264

G 100

Mesh cable tray in GV, S, F, E, E4

Products	B	A
G 100-10	116	95
G 100-15	166	142
G 100-20	216	190
G 100-30	316	282
G 100-40	418	376
G 100-50	518	470
G 100-60	618	564

GDR

Cover with turning bolts in S, F, E

Products	B
GDR 06	77
GDR 10	117
GDR 20	217
GDR 30	317
GDR 40	417
GDR 50	517
GDR 60	617

GD

Cover in S, F, E

Products	B
GD 06	77
GD 10	117
GD 20	217
GD 30	317
GD 40	417
GD 50	517
GD 60	617

Mesh cable tray-connectors

Products	O
GV 30	GV, S, F, E, E4
GVD 30	GV, S, F, E, E4
GVR 4.0	S, E, E4
GVR 4.5	S, E, E4
GVU	F, E, E4
GVK	F, E, E4

MP-G

Mounting plate in S, F, E

Products
MP-G
MP-G90

GD-SW

Storm protection cover clamp in F, E

Products
GD-SW

Mesh cable tray-divider

in S, F, E, E4

Products	H
GTR 50	33
GTR 100	75
GTRV 50	33
GTRV 100	75


GKAB

Mesh cable tray-outlet plate

Products
GKAB

Bolt Cutter

Products
BS

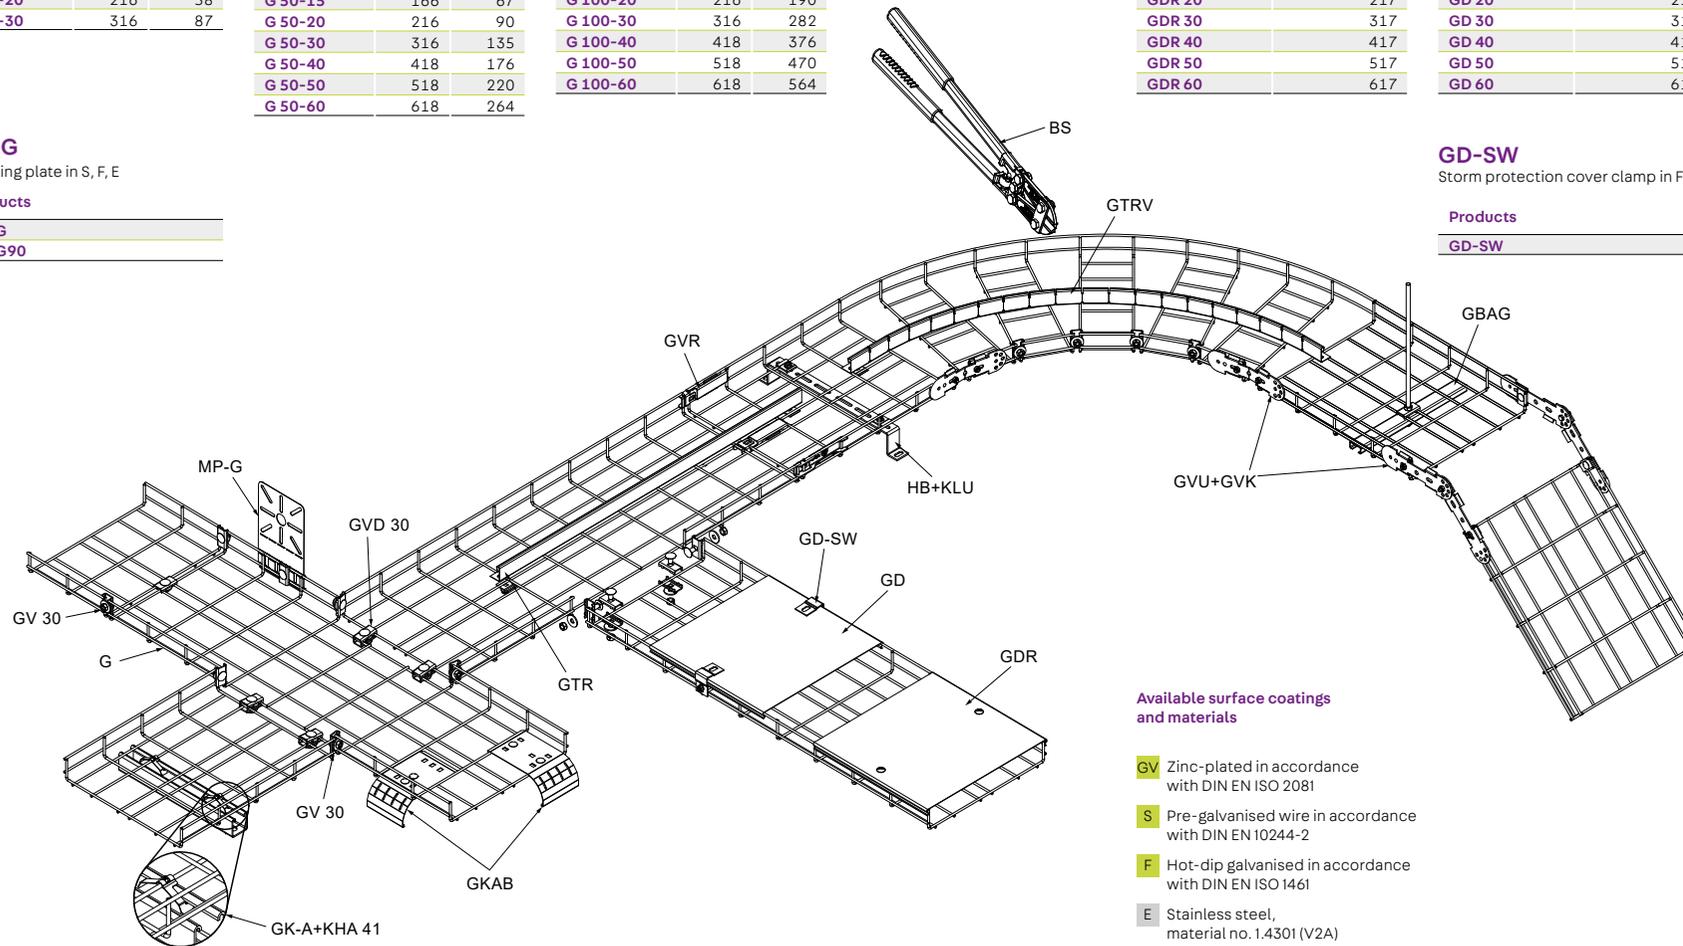

Available surface coatings and materials

- GV** Zinc-plated in accordance with DIN EN ISO 2081
- S** Pre-galvanised wire in accordance with DIN EN 10244-2
- F** Hot-dip galvanised in accordance with DIN EN ISO 1461
- E** Stainless steel, material no. 1.4301 (V2A)
- E4** Stainless steel, material no. 1.4571/1.4404 (V4A)



Find out more about our product range in the catalogue. If you would like personal advice, we will be happy to help.

Legend

B: Width in mm; **A:** Cross-sectional area in cm²;
H: Height in mm; **O:** Surface coatings/materials

Mesh Cable Trays G | Compact overview

DB

Ceiling bracket

Products	B	P _{max}
DB 10S	120	0,6
DB 20S	220	0,4
DB 30S	320	0,28

DKSL

Ceiling brackets, light

Products	B	P _{max}
DKSL 010S	120	0,9
DKSL 020S	220	0,5
DKSL 030S	320	0,4
DKSL 040S	420	0,3

KDU 40

Bracket support
40 x 30 mm

Products	L
KDU 40-02F	200
KDU 40-03F	300
KDU 40-04F	400
KDU 40-05F	500
KDU 40-06F	600
KDU 40-07F	700
KDU 40-08F	800
KDU 40-09F	900
KDU 40-10F	1000
KDU 40-11F	1100
KDU 40-12F	1200
KDU 40-13F	1300
KDU 40-14F	1400
KDU 40-15F	1500

KDU 57

Bracket support
57 x 30 mm

Products	L
KDU 57-02F	200
KDU 57-03F	300
KDU 57-04F	400
KDU 57-05F	500
KDU 57-06F	600
KDU 57-07F	700
KDU 57-08F	800
KDU 57-09F	900
KDU 57-10F	1000
KDU 57-11F	1100
KDU 57-12F	1200
KDU 57-13F	1300
KDU 57-14F	1400
KDU 57-15F	1500

KDAG 41

Ceiling bracket support
41 x 41 mm

Products	L
KDAG 41-02F	200
KDAG 41-03F	300
KDAG 41-04F	400
KDAG 41-05F	500
KDAG 41-06F	600
KDAG 41-07F	700
KDAG 41-08F	800
KDAG 41-09F	900
KDAG 41-10F	1000

KHUSS

Support piece

Products
KHUSS 40S
KHUSS 57S

SU, SA

Protection cap

Products
SU 40
SU 57
SA 2

GBAG

Middle suspending bracket in S, E

Products	H	B	P _{max}
GBAG 10	1000	41	0,5
GBAG 20	1000	180	0,5
GBAG 30	1000	280	0,5

HB

Spacer bracket floor/wall
in S, F, E

Products	B
HB 50-010	100
HB 50-020	200
HB 50-030	300
HB 50-040	400
HB 50-050	500
HB 50-060	600

Spacer bracket wall

in S, F, E

Products
GBH 30
GBH 50
GBHK 30
GBHK 50

KWF

Wall/support bracket, light

Products	B	P _{max}
KWF 010S	120	1,2
KWF 020S	220	1,2
KWF 030S	320	1,2
KWF 040S	420	1,2

KHA 41

Profile rail 41x41 mm,
perforated

Products	L
KHA 41-01F	100
KHA 41-02F	200
KHA 41-03F	300
KHA 41-04F	400
KHA 41-05F	500
KHA 41-06F	600

KW

Wall/support bracket, standard

Products	B	P _{max}
KW 010F	120	1,4
KW 015F	170	1,4
KW 020F	220	2,0
KW 030F	320	2,0
KW 040F	420	2,4
KW 050F	520	2,1
KW 060F	620	2,1
KW 070F	720	3,0


Fixing accessories Mesh cable trays - support systems

Products

1	KLU	Clamp fastening set
2	KLU-L, KLR 6x25	Clamp fastening set, long
3	GK-A	Mesh cable tray clamp

Available surface coatings and materials

GV	Zinc-plated in accordance with DIN EN ISO 2081
S	Pre-galvanised wire in accordance with DIN EN 10244-2
F	Hot-dip galvanised in accordance with DIN EN ISO 1461
E	Stainless steel, material no. 1.4301 (V2A)
E4	Stainless steel, material no. 1.4571/1.4404 (V4A)

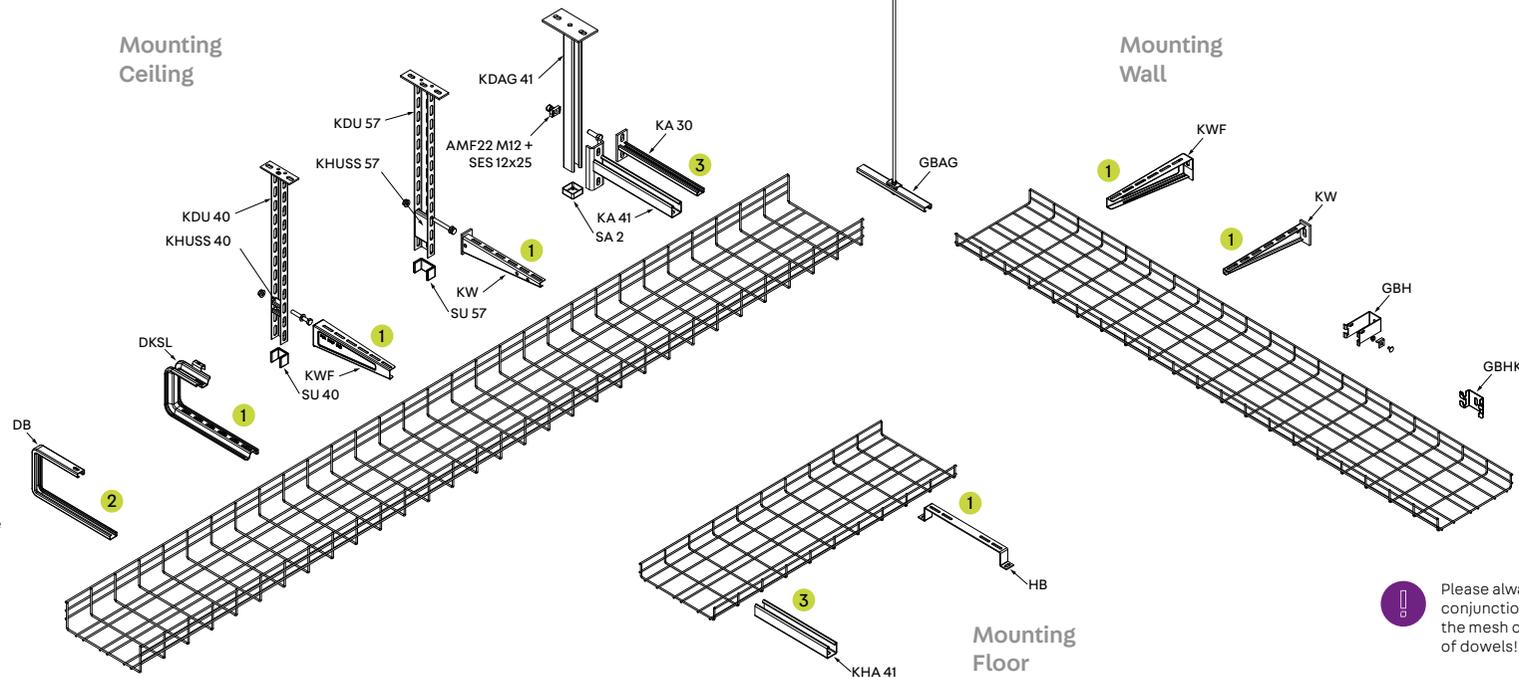

Legend

B: Width in mm; A: Cross-sectional area in cm²;
H: Height in mm; O: Surface coatings/materials;
P_{max}: max. Load in kN; F_d/P: dowel-to-anchor load in kN

Please always observe the support distance in conjunction with the load-bearing capacity of the mesh cable trays and the correct choice of dowels!

We recommend to order the KHUSS support pieces and the screws for attaching the brackets to the U-standards at the same time.