


Compact single outlet, quadrangular British Standard

Assembly instruction






The quadrangular compact single outlet, external dimensions 125 x 125 mm and 160 x 160 mm for installation directly into screed, suitable for dry and wet maintenance rooms. Scope of delivery contains floor box, stainless steel unit and shuttering unit. For parquet and stone floors of 12/22 mm, levelling range: 80-125 mm, resp. 90-135 mm.

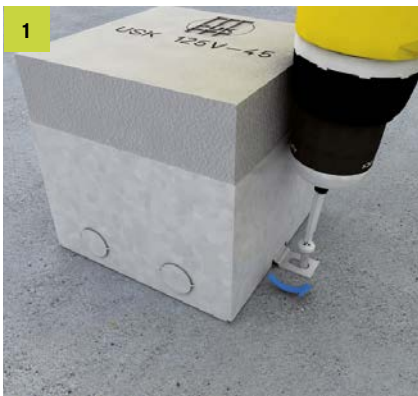


1 Floor box

Align floor box in dead centre as delivered. Bend open ears and fix to raw ceiling.

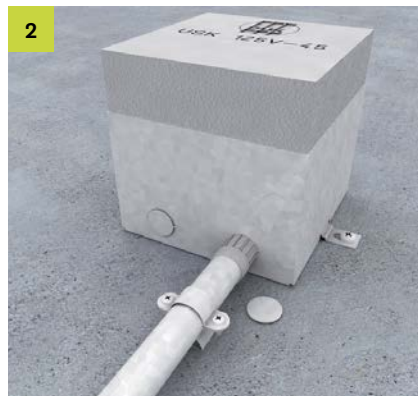


2 Steel armored conduit

Bend open perforation in the sides of floor box and insert steel armored conduit.

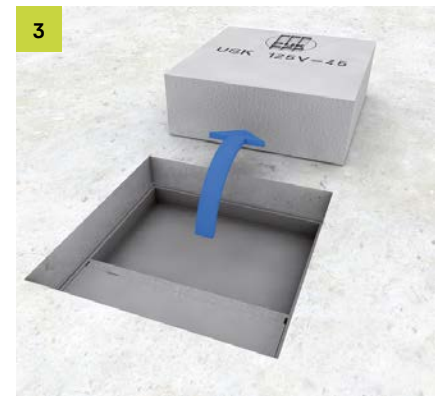

3 Casting screed

Seal all openings of the floor box as delivered and cast screed accurately to the shuttering unit. Remove shuttering unit when screed is hardened.

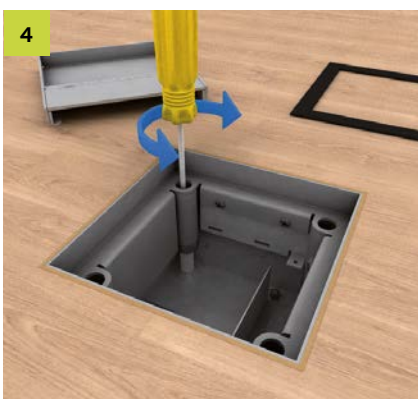

4 Levelling to floor

Remove cartridge cover and rubber seal and adjust single outlet to floor height flush over the four levelling screws.



5 Data systems

Insert connected data jacks from below into the plate. Fasten equipped plate at the side of the single outlet.




6 Heavy current systems

Insert heavy current devices from the top and connect from below. Insert equipped plate using the snap tabs into the frame and fasten the opposite side.




Assembly
Insert heavy current and low current plugs.

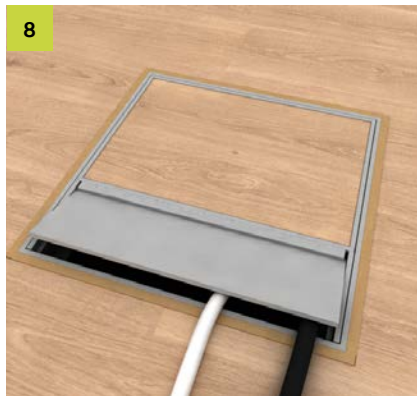

Single outlet
Insert rubber seal and cartridge cover, in case of dry maintenance floors install cartridge unit with cable outlet. The unit must be integrated in the potential equalization of the system.




Installation devices
Latch sockets and data devices into plate and connect conducts.

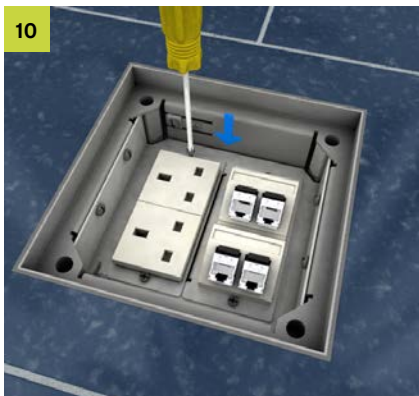

Single outlet frame
Fasten equipped plates to single outlet frame.



Assembly
Insert heavy current and low current plugs.

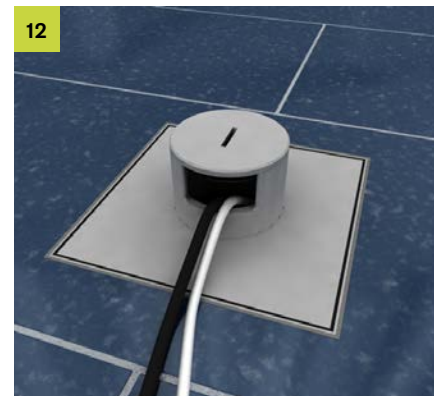

Tube
Insert rubber seal and tube cover. In case of wet maintenance floors, mount single tube outlet and tube. The unit must be integrated in the potential equalization of the system.

All rights reserved. Reprinting and any electronic reproduction only authorised with our written permission. Errors excepted and subject to technical changes. No liability can be accepted by the publisher on any legal basis whatsoever. This publication supersedes all previous versions of the document, thereby rendering them invalid..

© PohlCon | PC-LIT-MA-UFS-UKE-BS-EN | 10-2023 | 2. v. | 04-2025

PohlCon GmbH

Nobelstr. 51
12057 Berlin
Germany

T +49 30 68283-04
F +49 30 68283-383

www.pohlcon.com