

ORDER FORM

KUNEX[®] welded construction

BK02

Rev.05 vom: 2023-03-13

Customer:	Project:
Com.:	Element:


Joint tape requirements

- DIN 18541 BV (bitumen-compatible)
- DIN 18541 NB (non bitumen compatible)
- factory standard NB (according to abP, non bitumen compatible)

Dimensions

- L1 = _____ mm
- End specification:**
- locked
 - closed
 - none

- L2 = _____ mm
- L3 = _____ mm
- End specification:**
- locked
 - closed
 - none

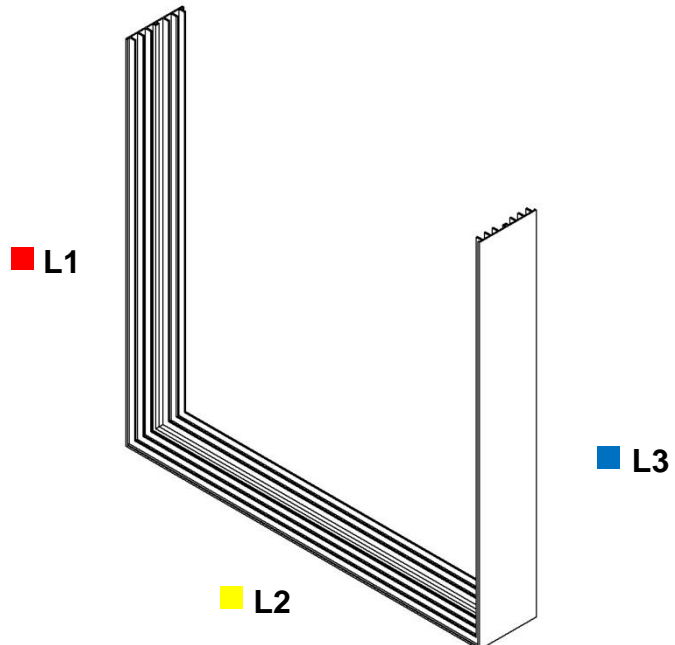

Number


_____ pieces

Manufacturing tolerances according to
DIN 16941 and DIN 18020 table 1:


Length ≤ 3000mm = ± 15mm
Length 3000mm – 6000mm = ± 20mm
Length > 6000mm = ± 30mm

Note:
Dimensional deviations of up to 3% are possible due to
external influences such as temperature and storage
conditions.

locked
(illustration exemplary)

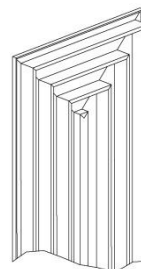

closed
(illustration exemplary)




Please select joint tape profile on page 2

To be completed by
H-BAU Technik (S.-no.)

ORDER FORM

KUNEX[®] welded construction

BK02

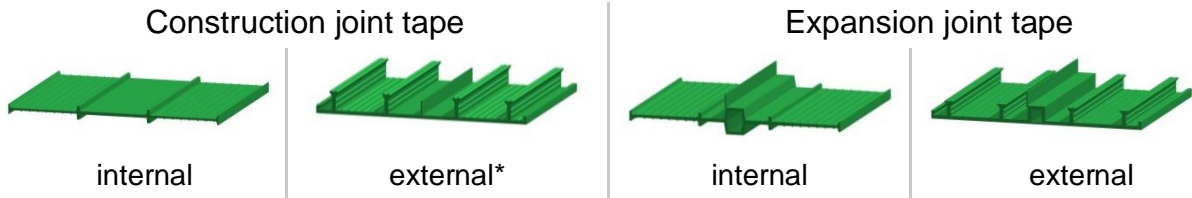

Joint tape section L1 ■

A240
A320
A500**

AA240/20
AA240/25
AA240/35
AA320/20***
AA320/25
AA320/35
AA500/35

D240
D320
D500

DA240/20
DA240/35
DA320/20***
DA320/25
DA320/35
DA500/35**

Joint tape section L2 ■

A240
A320
A500**

AA240/20
AA240/25
AA240/35
AA320/20***
AA320/25
AA320/35
AA500/35

D240
D320
D500

DA240/20
DA240/35
DA320/20***
DA320/25
DA320/35
DA500/35**

Joint tape section L3 ■

A240
A320
A500**

AA240/20
AA240/25
AA240/35
AA320/20*
AA320/25
AA320/35
AA500/35

D240
D320
D500

DA240/20
DA240/35
DA320/20***
DA320/25
DA320/35
DA500/35**

* as DIN BV only

** only available upon request as A500 DIN BV

*** only as factory norm-joint tape (NB), not DIN BV

Released by: _____

date: _____