



Completed by  
H-BAU Technik (s.-no.)



# ORDER FORM

## KUNEX® spliced solution

BK04

Rev.00 from: 2017-08-25

Client:	Project:
Com.:	Element:

### Joint tape requirements

DIN 18541  
work standard (abP)

bitumen-compatible (BV)  
non bitumen-compatible (NB)

### Width of joint tape [mm]

100      150      190      240      320      500

### Dimensions

■ L1 = \_\_\_\_\_ mm


■ L2 = \_\_\_\_\_ mm

■ L3 = \_\_\_\_\_ mm

■ L4 = \_\_\_\_\_ mm

### Number

\_\_\_\_\_ pieces

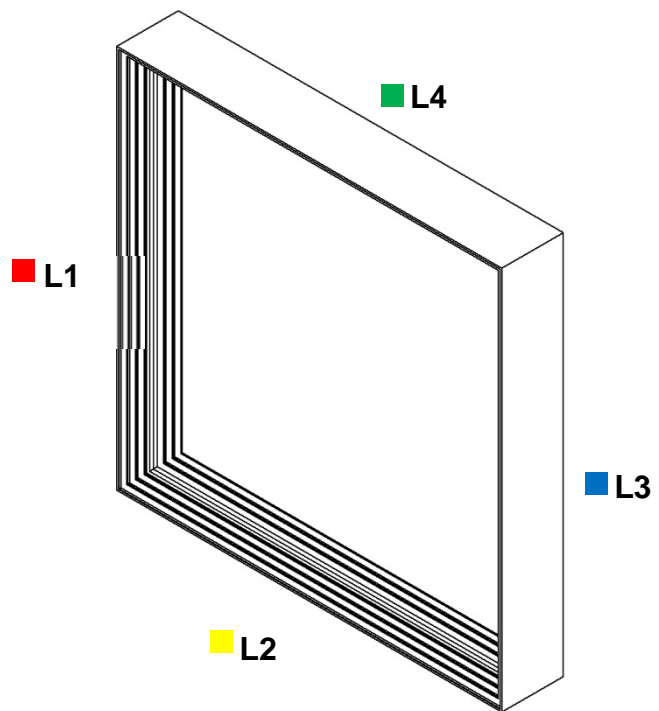

manufacturing tolerances according to  
DIN 16941 and DIN 18020 table 1:

Length ≤ 3000mm = ± 15mm

Length 3000mm – 6000mm = ± 20mm

Length > 6000mm = ± 30mm

#### Note:

By external influences, e.g. temperature and storage conditions,  
dimensional deviations of up to 3% are possible.

Please select joint tape profile on page 2

H-BAU Technik GmbH

Am Güterbahnhof 20 ■ D-79771 Klettgau ■ Phone: +49 7742 9215-0 ■ Fax: +49 7742 9215-129 ■ Email: info@h-bau.de ■ www.h-bau.de





Completed by  
H-BAU Technik (s.-no.)




# ORDER FORM


## KUNEX® spliced solution

BK04


### Joint tape section ■ L1

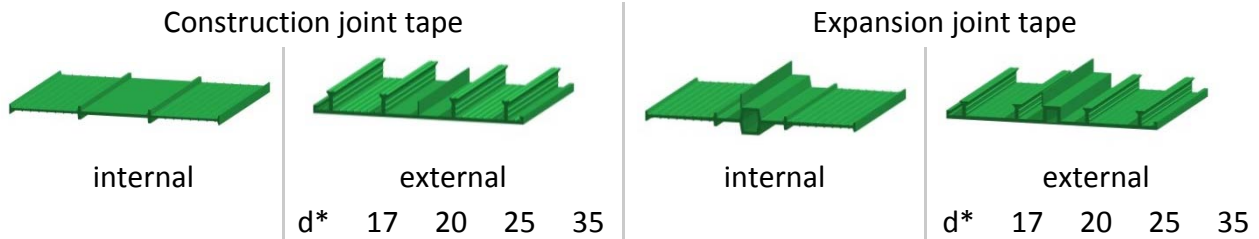


### Joint tape section ■ L2

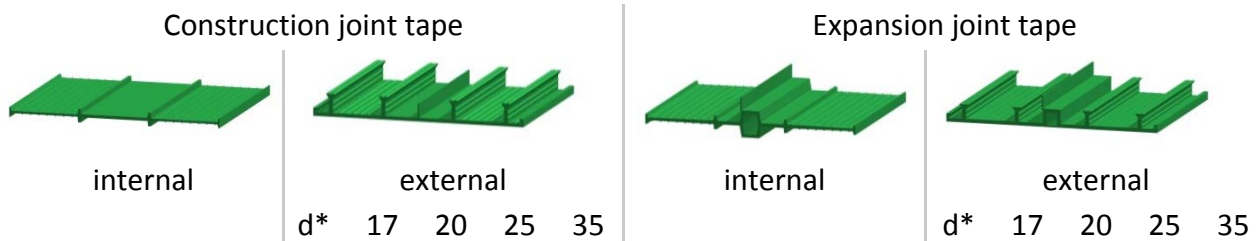

### Joint tape section ■ L3

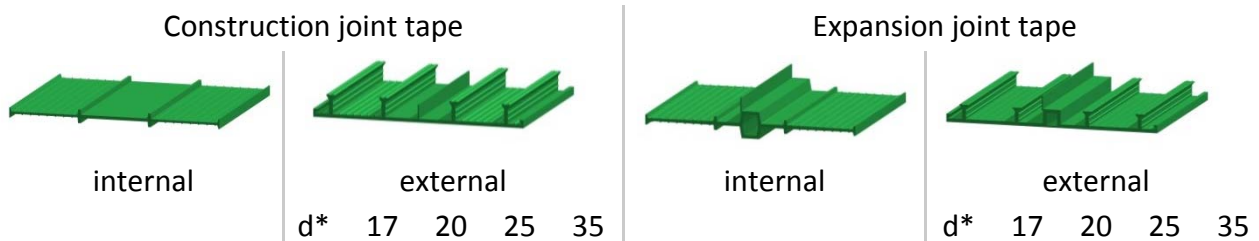

### Joint tape section ■ L4

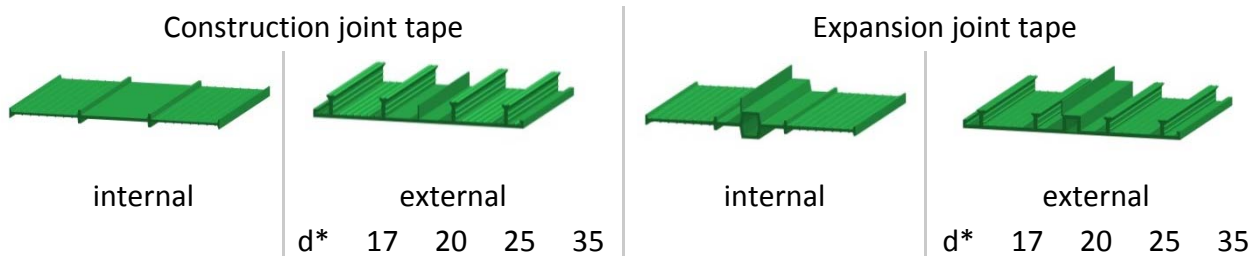

d\* = height of profile

Released by: \_\_\_\_\_ date: \_\_\_\_\_