


# Ship ladder line

Compact information




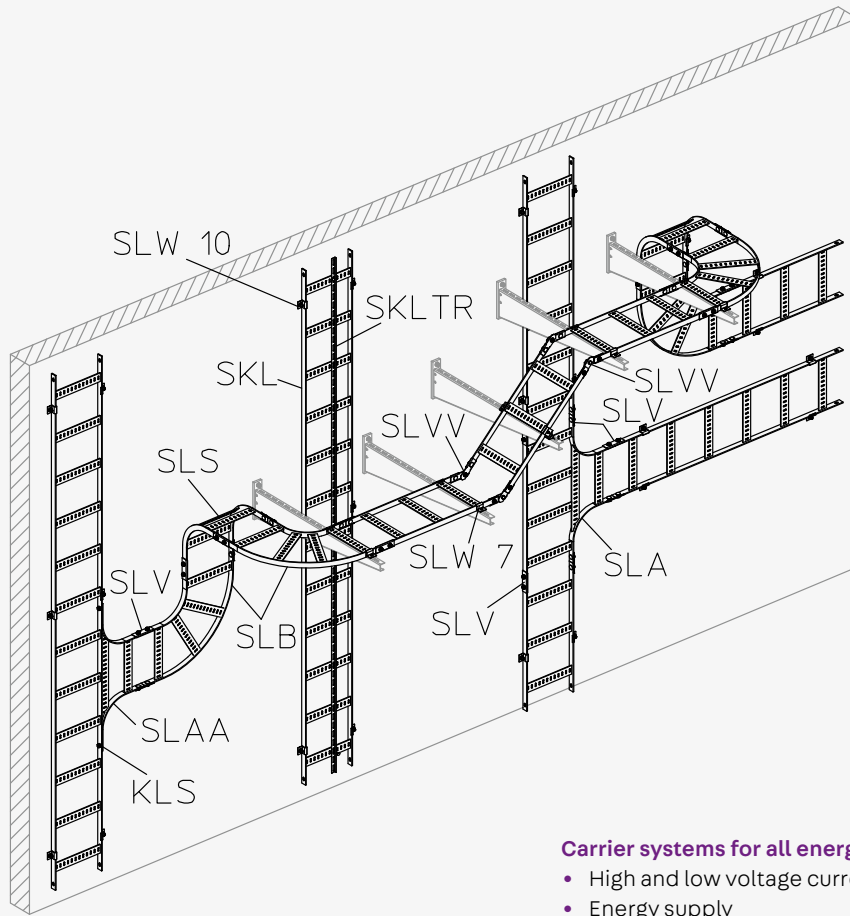

**Carrier systems for all energy related areas**

- High and low voltage current
- Energy supply
- Measuring and control technology
- Process control technology

**Capacity diagram ship cable ladders showing distributed load [Q] and distance between supports [StA]**

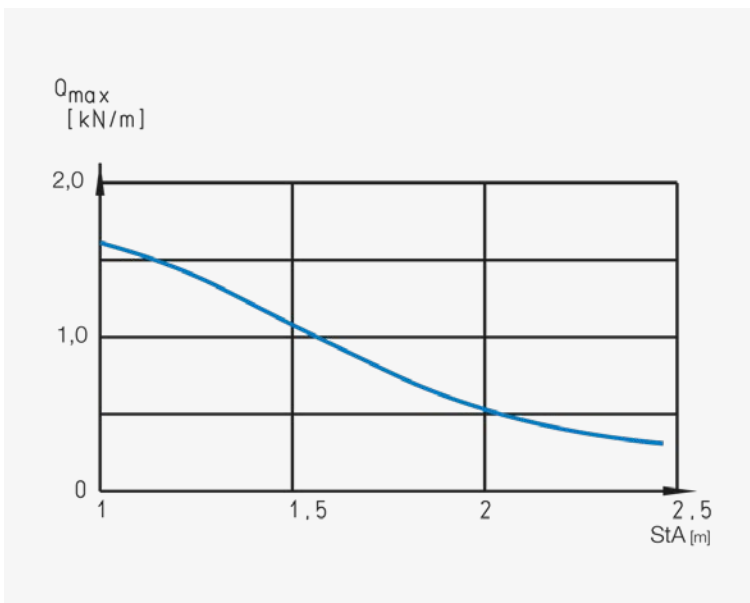



### Ship ladders

Ship ladders in widths of 75, 100, 150, 200, 250, 300, 400 and 500 mm in the following versions: Hot dip galvanized according to DIN EN ISO 1461 blank or blank with prime coating



### Formed parts

90° horizontal or vertical bend fittings and branches in the following versions: Hot dip galvanized according to DIN EN ISO 1461 blank or blank with prime coating



### Accessories

Horizontal and vertical coupler, jointing bracket and barrier strip

Content subject to technical change without notice. Errors and omissions excepted. This document may not be reprinted or electronically reproduced without our prior written permission. This document supersedes all previous documentation; its publication renders all previous documentation invalid.

© PohlCon | PC-LIT-KI-SLP-EN | 04-2024 | 1. | 04-2023

**PohlCon GmbH**

Nobelstr. 51  
12057 Berlin  
Germany

T +49 30 68 283-04  
F +49 30 68 283-383

[www.pohlcon.com](http://www.pohlcon.com)