


## KHA 8

Profilschiene 40x22 mm, gelocht Fluchtweginstallation

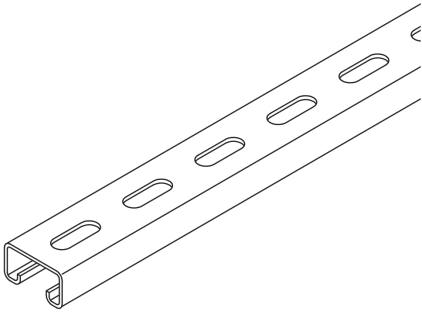

Stahl, stück-/tauchfeuerverzinkt

Artikel	H	B	L	H <sub>p</sub>	B <sub>p</sub>	t	Gewicht
KHA 8-01F	22 mm	40 mm	100 mm	22 mm	40 mm	2,00 mm	0,145 kg
KHA 8-02F	22 mm	40 mm	200 mm	22 mm	40 mm	2,00 mm	0,310 kg
KHA 8-03F	22 mm	40 mm	300 mm	22 mm	40 mm	2,00 mm	0,460 kg
KHA 8-04F	22 mm	40 mm	400 mm	22 mm	40 mm	2,00 mm	0,620 kg
KHA 8-05F	22 mm	40 mm	500 mm	22 mm	40 mm	2,00 mm	0,770 kg
KHA 8-06F	22 mm	40 mm	600 mm	22 mm	40 mm	2,00 mm	0,930 kg
KHA 8-07F	22 mm	40 mm	700 mm	22 mm	40 mm	2,00 mm	1,080 kg

**H:** Höhe

**B:** Breite

**L:** Länge

**H<sub>p</sub>:** Profilhöhe


**B<sub>p</sub>:** Profilbreite

**t:** Materialstärke

**Gewicht:** Gewicht je Lagermengeneinheit

## DETAIL- UND ANWENDUNGSBILDER





$$W_y = 1.05 \text{ cm}^3$$
$$W_z = 2.24 \text{ cm}^3$$
$$I_y = 1.18 \text{ cm}^4$$
$$I_z = 4.48 \text{ cm}^4$$

