

STU-BS 50

Steigetrasse, gleichschenkliges U-Profil, Funktionserhalt



Stahl, band-/sendzimirverzinkt

Artikel	H	B	L	Gewicht
STU-BS 50-02-3S	50 mm	200 mm	3000 mm	10,400 kg
STU-BS 50-03-3S	50 mm	300 mm	3000 mm	11,880 kg
STU-BS 50-04-3S	50 mm	400 mm	3000 mm	13,010 kg
STU-BS 50-05-3S	50 mm	500 mm	3000 mm	14,100 kg
STU-BS 50-06-3S	50 mm	600 mm	3000 mm	15,370 kg

Stahl, stück-/tauchfeuerverzinkt

Artikel	H	B	L	Gewicht
STU-BS 50-02-3F	50 mm	200 mm	3000 mm	11,820 kg
STU-BS 50-03-3F	50 mm	300 mm	3000 mm	12,910 kg
STU-BS 50-04-3F	50 mm	400 mm	3000 mm	14,210 kg
STU-BS 50-05-3F	50 mm	500 mm	3000 mm	15,680 kg
STU-BS 50-06-3F	50 mm	600 mm	3000 mm	16,660 kg

H: Höhe


B: Breite

L: Länge

Gewicht: Gewicht je Lagermengeneinheit




DETAIL- UND ANWENDUNGSBILDER

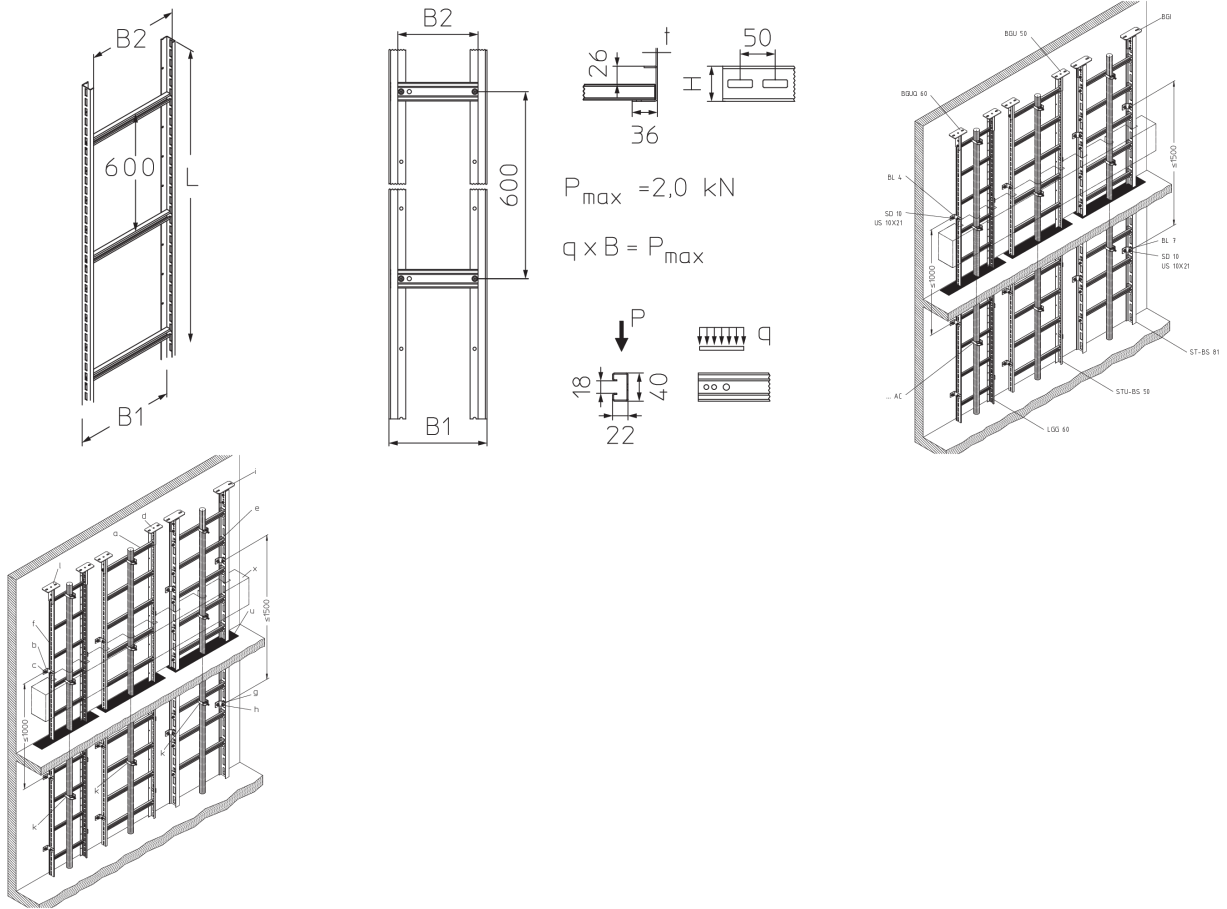

$P_{max} = 2,0 \text{ kN}$

$q \times B = P_{max}$



OPTIONALES ZUBEHÖR

LGV 50, BL 4, AC, BGUQ 50, BGUQ-BS 50



Brandschutz

