


KHA 2

Profilschiene 50x31 mm, gelocht

Profilschiene 50x31x3,25 mm, mit fortlaufender Lochung
13x26, Schlitzweite 22 mm

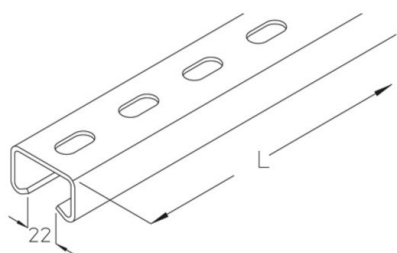

Tauchfeuerverzinkt, nach DIN EN ISO 1461

Artikel	H	B	L	t	G
KHA 2-05F	31 mm	50 mm	500 mm	3,25 mm	1,5 kg
KHA 2-10F	31 mm	50 mm	1000 mm	3,25 mm	3 kg
KHA 2-15F	31 mm	50 mm	1500 mm	3,25 mm	4,5 kg
KHA 2-20F	31 mm	50 mm	2000 mm	3,25 mm	6 kg
KHA 2-30F	31 mm	50 mm	3000 mm	3,25 mm	9 kg
KHA 2-60F	31 mm	50 mm	6000 mm	3,25 mm	17,9 kg

H: Höhe

B: Breite



L: Länge

t: Materialstärke

G: Gewicht

DETAILS / ANWENDUNGEN



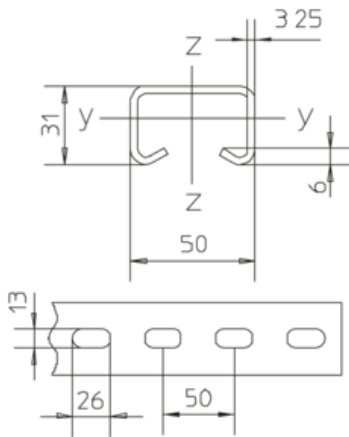

$$W_y = 2.31 \text{ cm}^3$$

$$W_z = 5.40 \text{ cm}^3$$

$$I_y = 3.77 \text{ cm}^4$$

$$I_z = 13.49 \text{ cm}^4$$

OPTIONALES ZUBEHÖR

HS22, SKS H

