


KHA 8

Profilschiene 40x22 mm, gelocht Fluchtweginstallation

Profilschiene 40x22x2,00 mm, mit fortlaufender Lochung 11x30, Schlitzweite 18 mm

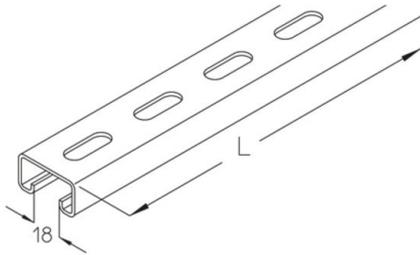


Tauchfeuerverzinkt, nach DIN EN ISO 1461

Artikel	H	B	L	t	G
KHA 8-01F	22 mm	40 mm	100 mm	2,00 mm	0,14 kg
KHA 8-02F	22 mm	40 mm	200 mm	2,00 mm	0,30 kg
KHA 8-03F	22 mm	40 mm	300 mm	2,00 mm	0,46 kg
KHA 8-04F	22 mm	40 mm	400 mm	2,00 mm	0,60 kg
KHA 8-05F	22 mm	40 mm	500 mm	2,00 mm	0,76 kg
KHA 8-06F	22 mm	40 mm	600 mm	2,00 mm	0,90 kg
KHA 8-07F	22 mm	40 mm	700 mm	2,00 mm	1,06 kg

H: Höhe
B: Breite
L: Länge
t: Materialstärke
G: Gewicht

DETAILS / ANWENDUNGEN



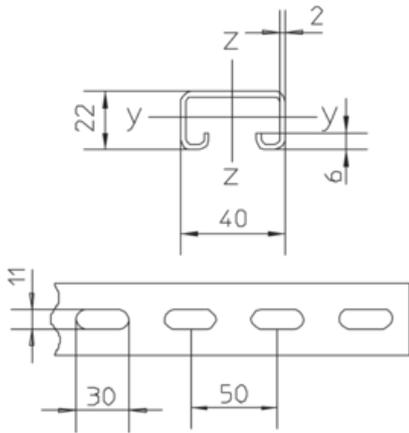

OPTIONALES ZUBEHÖR

HS18, AM18, AMF18, ASK 8

