


## KHAL 41

Profilschiene 41x41 mm, gelocht

Profilschiene 41x41x1,50 mm, mit fortlaufender Lochung  
14x30, Schlitzweite 22 mm

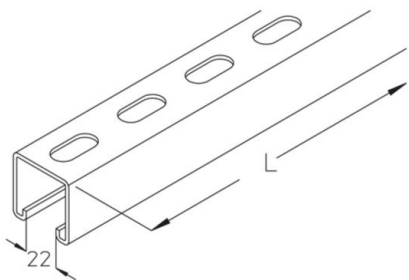

### Sendzimir-feuerverzinkt, nach DIN EN 10346

Artikel	H	B	L	t	G
KHAL 41-30S	41 mm	41 mm	3000 mm	1,50 mm	4,68 kg
KHAL 41-60S	41 mm	41 mm	6000 mm	1,50 mm	9,36 kg

### Tauchfeuerverzinkt, nach DIN EN ISO 1461

Artikel	H	B	L	t	G
KHAL 41-05F	41 mm	41 mm	500 mm	1,50 mm	0,8 kg
KHAL 41-10F	41 mm	41 mm	1000 mm	1,50 mm	1,56 kg
KHAL 41-15F	41 mm	41 mm	1500 mm	1,50 mm	2,34 kg
KHAL 41-20F	41 mm	41 mm	2000 mm	1,50 mm	3,3 kg
KHAL 41-30F	41 mm	41 mm	3000 mm	1,50 mm	4,68 kg
KHAL 41-36F	41 mm	41 mm	3600 mm	1,50 mm	6,01 kg
KHAL 41-60F	41 mm	41 mm	6000 mm	1,50 mm	9,36 kg

**H:** Höhe

**B:** Breite



**L:** Länge

**t:** Materialstärke

**G:** Gewicht



## DETAILS / ANWENDUNGEN

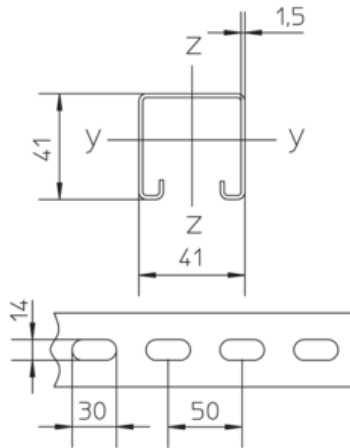

$$\begin{aligned}W_y &= 2.01 \text{ cm}^3 \\W_z &= 2.91 \text{ cm}^3 \\I_y &= 4.19 \text{ cm}^4 \\I_z &= 5.96 \text{ cm}^4\end{aligned}$$

## OPTIONALES ZUBEHÖR

AM22, SA 2, SAI 41, AMF22

