


LGA 100

Leiterabzweig, Höhe = 100 mm

Leiterabzweig, Formteil als T-Stück

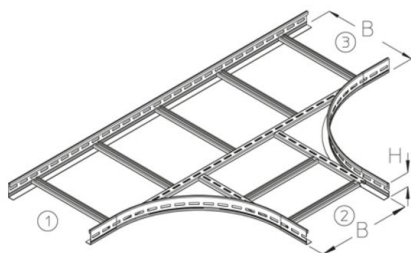

Tauchfeuerverzinkt, nach DIN EN ISO 1461

Artikel	H	B	R	G
LGA 100-20F	100 mm	200 mm	400 mm	5,62 kg
LGA 100-30F	100 mm	300 mm	400 mm	6,37 kg
LGA 100-40F	100 mm	400 mm	400 mm	7,12 kg
LGA 100-50F	100 mm	500 mm	400 mm	7,86 kg
LGA 100-60F	100 mm	600 mm	400 mm	8,61 kg


Edelstahl, Werkstoff Nr. 1.4301 (V2A)

Artikel	H	B	R	G
LGA 100-20E	100 mm	200 mm	400 mm	5,28 kg
LGA 100-30E	100 mm	300 mm	400 mm	5,99 kg
LGA 100-40E	100 mm	400 mm	400 mm	6,69 kg
LGA 100-50E	100 mm	500 mm	400 mm	7,4 kg
LGA 100-60E	100 mm	600 mm	400 mm	8,1 kg

H: Höhe
B: Breite
R: Radius
G: Gewicht



DETAILS / ANWENDUNGEN

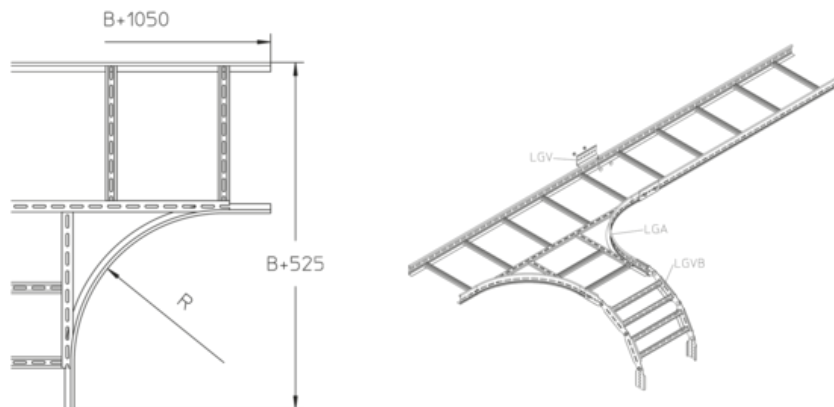

OPTIONALES ZUBEHÖR

LGV 100, LGVH 100, LGVV 100, KLU, LAD, LADR, LGTRV 100



UL klassifiziert

