


## LKDR

Leiterkreuzungsdeckel mit Drehriegeln

Deckel für Leiterkreuzungen

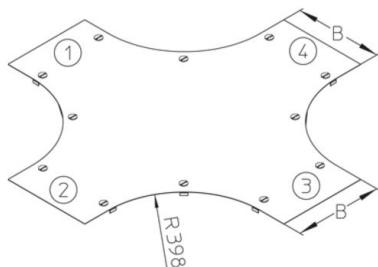

### Sendzimir-feuerverzinkt, nach DIN EN 10346

Artikel	B	R	t	G
LKDR 20S	204 mm	398 mm	0,75 mm	4,2 kg
LKDR 30S	304 mm	398 mm	1,00 mm	7,58 kg
LKDR 40S	404 mm	398 mm	1,00 mm	9,81 kg
LKDR 50S	504 mm	398 mm	1,25 mm	15,13 kg
LKDR 60S	604 mm	398 mm	1,25 mm	18,30 kg

### Tauchfeuerverzinkt, nach DIN EN ISO 1461

Artikel	B	R	t	G
LKDR 20F	204 mm	398 mm	0,75 mm	4,47 kg
LKDR 30F	304 mm	398 mm	1,00 mm	8,09 kg
LKDR 40F	404 mm	398 mm	1,00 mm	10,48 kg
LKDR 50F	504 mm	398 mm	1,25 mm	15,23 kg
LKDR 60F	604 mm	398 mm	1,25 mm	19,56 kg

### Edelstahl, Werkstoff Nr. 1.4301 (V2A)

Artikel	B	R	t	G
LKDR 20E	204 mm	398 mm	0,80 mm	4,52 kg

Seite.1



Artikel	B	R	t	G
LKDR 30E	304 mm	398 mm	1,00 mm	7,63 kg
LKDR 40E	404 mm	398 mm	1,00 mm	9,87 kg
LKDR 50E	504 mm	398 mm	1,25 mm	15,22 kg
LKDR 60E	604 mm	398 mm	1,25 mm	18,41 kg

**B:** Breite  
**R:** Radius  
**t:** Materialstärke  
**G:** Gewicht

## DETAILS / ANWENDUNGEN

