


## SEMSS

Sechskantmutter, selbstsichernd, DIN 985

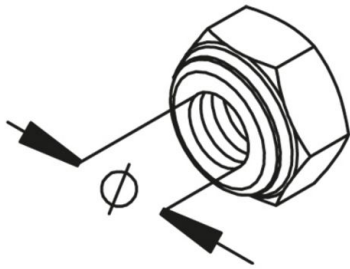

galvanisch verzinkt gemäß DIN EN ISO 19598 / DIN EN ISO 2081

Artikel	Ø	t	SW	G
SEMSS 5	5 mm	5,00 mm	8 mm	0,2 kg/100
SEMSS 6	6 mm	6,00 mm	10 mm	0,2 kg/100
SEMSS 8	8 mm	8,00 mm	13 mm	0,45 kg/100
SEMSS 10	10 mm	10,00 mm	17 mm	1,1 kg/100

Edelstahl, Werkstoff Nr. 1.4301 (V2A)

Artikel	Ø	t	SW	G
SEMSS 6E	8 mm	8,00 mm	13 mm	0,20 kg/100
SEMSS 8E	8 mm	8,00 mm	13 mm	0,45 kg/100
SEMSS 10E	10 mm	10,00 mm	17 mm	1,1 kg/100

Edelstahl, Werkstoff Nr. 1.4571/1.4404 (V4A)

Artikel	Ø	t	SW	G
SEMSS 6E4	6 mm	6,00 mm	10 mm	0,2 kg/100
SEMSS 8E4	8 mm	8,00 mm	13 mm	0,45 kg/100
SEMSS 10E4	10 mm	10,00 mm	17 mm	1,0 kg/100

Seite 1



Ø: Durchmesser  
t: Materialstärke  
SW: Schlüsselweite  
G: Gewicht

## DETAILS / ANWENDUNGEN

