


## UEBSES

### Endstück

Endstück, anpassbar an Bodenbelagshöhe (3 mm) zum Verschließen des Estrichbündigen Kanals, inklusive Traverse.

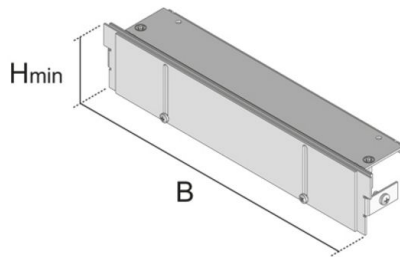

Sendzimir-feuerverzinkt, nach DIN EN 10346

Artikel	H <sub>min</sub>	N	B	G
UEBSES 60-20S	60 mm	50 mm	200 mm	0,53 kg
UEBSES 60-30S	60 mm	50 mm	300 mm	0,92 kg
UEBSES 60-40S	60 mm	50 mm	400 mm	1,11 kg
UEBSES 60-50S	60 mm	50 mm	500 mm	1,66 kg
UEBSES 100-20S	100 mm	50 mm	200 mm	0,64 kg
UEBSES 100-30S	100 mm	50 mm	300 mm	0,99 kg
UEBSES 100-40S	100 mm	50 mm	400 mm	1,34 kg
UEBSES 100-50S	100 mm	50 mm	500 mm	1,96 kg

**H<sub>min</sub>**: min. Einbauhöhe

**N**: Nivellierbereich

**B**: Breite

**G**: Gewicht

