

# ORDER FORM

## KUNEX<sup>®</sup> welded construction with corner joint tape

BK03

Rev. 07 dated 2023-03-13

Customer:	Project:
Com.:	Element:

### Joint tape requirements

- DIN 18541 BV (bitumen-compatible)
- DIN 18541 NB (non bitumen compatible)
- factory standard NB (according to abP, non bitumen compatible)

### Dimensions

■ L1 = \_\_\_\_\_ mm

**End specification:**  locked  
 closed  
 none



■ L2 = \_\_\_\_\_ mm

■ L3 = \_\_\_\_\_ mm

**End specification:**  locked  
 closed  
 none

### Number

\_\_\_\_\_ pieces

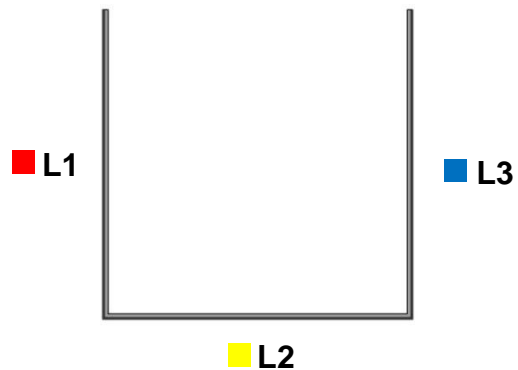


Manufacturing tolerances according to  
DIN 16941 and DIN 18020 table 1:


Length ≤ 3000mm = ± 15mm  
Length 3000mm – 6000mm = ± 20mm  
Length > 6000mm = ± 30mm

Note:  
Dimensional deviations of up to 3% are possible due to  
external influences such as temperature and storage  
conditions.

*locked*  
(illustration exemplary)

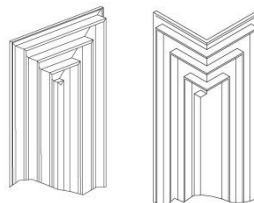

*closed*  
(illustration exemplary)

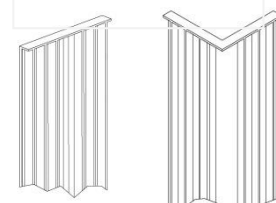

**Please select joint tape profile on page 2**

# ORDER FORM

To be completed by  
H-BAU Technik (S.-no.)

---

**KUNEX®** welded construction with corner joint tape

BK03

## Type of joint tape

### External construction joint tape\*

- AA240/20
- AA240/25
- AA240/35
- + corner joint tape AA120/120EA
  
- AA320/20\*\*
- AA320/25
- AA320/35
- + corner joint tape AA165/165EA

### External expansion joint tape

- DA240/20
- DA240/35
- + corner joint tape DA120/120EA
  
- DA320/20\*\*
- DA320/25
- DA320/35
- + corner joint tape DA165/165EA

\* a DIN BV only

\*\* only as factory norm-joint tape (NB)

Released by \_\_\_\_\_

date: \_\_\_\_\_