


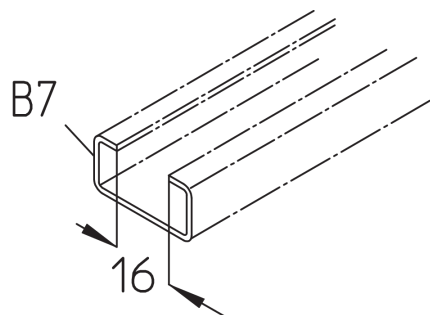

B 7

30x15 mm profile rail, unperforated

The profile rail B 7 is unperforated and consists of a C profile 30 x 15 mm with a slot width of 16 mm (material thickness = 1.5 mm). We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications. It is available in lengths of 3000 or 6000 mm.

Artikel	Typ	H _p	B _p	L	t	W
B 7-30B	Channel B 7-30B	15 mm	30 mm	3000 mm	1.50 mm	2.220 kg
B 7-60B	Channel B 7-60B	15 mm	30 mm	6000 mm	1.50 mm	4.440 kg




Artikel	Typ	H _p	B _p	L	t	W
B 7-30S	Channel B 7-30S	15 mm	30 mm	3000 mm	1.50 mm	2.220 kg
B 7-60S	Channel B 7-60S	15 mm	30 mm	6000 mm	1.50 mm	4.440 kg

Artikel	Typ	H _p	B _p	L	t	W
B 7-30F	Channel B 7-30F	15 mm	30 mm	3000 mm	1.50 mm	2.500 kg
B 7-60F	Channel B 7-60F	15 mm	30 mm	6000 mm	1.50 mm	4.750 kg

Artikel	Typ	H _p	B _p	L	t	W
B 7-30E	Channel B 7-30E	15 mm	30 mm	3000 mm	1.50 mm	2.220 kg
B 7-60E	Channel B 7-60E	15 mm	30 mm	6000 mm	1.50 mm	4.440 kg



DETAIL- UND ANWENDUNGSBILDER

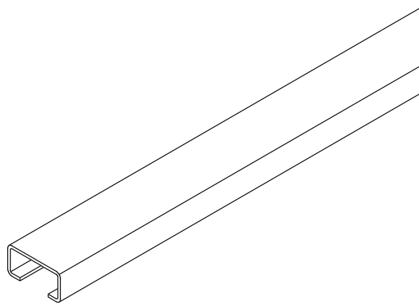

$$\begin{aligned}W_y &= 0.32 \text{ cm}^3 \\W_z &= 0.83 \text{ cm}^3 \\I_y &= 0.30 \text{ cm}^4 \\I_z &= 1.26 \text{ cm}^4\end{aligned}$$

OPTIONALES ZUBEHÖR

HS16, AM 16

