


## BKVBDR-RHP

Floor duct branch cover, variable with anti-slip embossing



The BKVBDR-RHP variable floor duct cover is placed on top of the floor duct bend BKVB and protects cables and supply lines from flying sparks and other mechanical influences. It is 100 to 600 mm wide corresponding to the bend. The floor duct bend cover is made of sendzimir hot-dip galvanized steel with slip resistance class R12. With a maximum compartment size of 200 mm, we guarantee a tested load capacity of 5.00 kN according to EN 50085-2-2. They come with pre-assembled turning bolts.



steel, continuously hot galvanized/Sendzimir process

Products	B	t	P <sub>max</sub>		weight
BKVBDR-RHP 10S	100 mm	2,00 mm	5,00 kN	HORIZONTAL	0,350 kg
BKVBDR-RHP 15S	150 mm	2,00 mm	5,00 kN	HORIZONTAL	0,570 kg
BKVBDR-RHP 20S	200 mm	2,00 mm	5,00 kN	HORIZONTAL	0,850 kg
BKVBDR-RHP 30S	300 mm	2,00 mm	5,00 kN	HORIZONTAL	1,600 kg
BKVBDR-RHP 40S	400 mm	2,00 mm	5,00 kN	HORIZONTAL	2,590 kg
BKVBDR-RHP 50S	500 mm	2,00 mm	5,00 kN	HORIZONTAL	3,830 kg
BKVBDR-RHP 60S	600 mm	2,00 mm	5,00 kN	HORIZONTAL	5,310 kg





**B:** width  
**t:** material thickness  
**P<sub>max</sub>:** maximum load

## DETAIL AND APPLICATION IMAGES



# PRODUCT INFORMATION

---

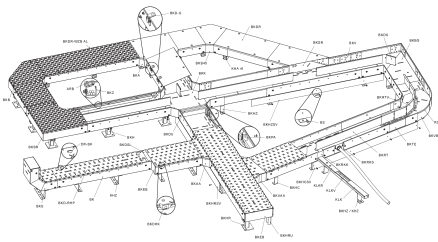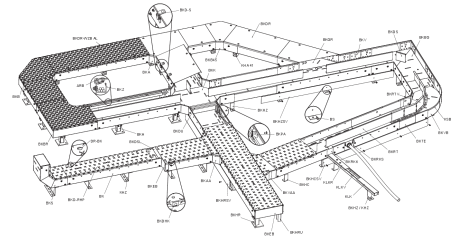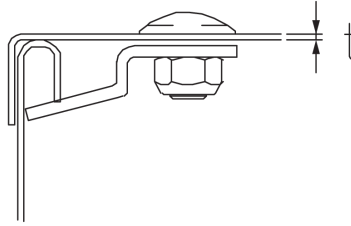

## OPTIONAL ACCESSORIES

DR-BK, BKDU 100, BKDU 110

DIN

Load requirements according to, EN 50085-2-2

