


BKBGDR-RHP

floor duct bend cover with mitre cut and non-slip embossing

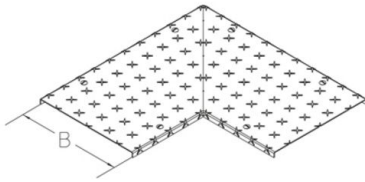

The cover consists of a 2 mm thick galvanized sheet steel with 1 mm non-slip embossing and slip resistance R12 according to DIN 51130. In compliance with the installation specifications and a maximum compartment size of 200 mm, the cover guarantees a tested load capacity of at least 500 kg according to EN 50085-2-2.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	t	P_{max}	slip resistance class	G
BKBGDR-RHP 10S	100 mm	2,00 mm	5 kN	R12	1,27 kg
incl.:					
1x BKGRDR-RHP 10S	floor duct cover, right with mitre cut and non-slip embossing				
1x BKGLDR-RHP 10S	floor duct cover, left with mitre cut and non-slip embossing				
BKBGDR-RHP 15S	150 mm	2,00 mm	5 kN	R12	1,86 kg
incl.:					
1x BKGRDR-RHP 15S	floor duct cover, right with mitre cut and non-slip embossing				
1x BKGLDR-RHP 15S	floor duct cover, left with mitre cut and non-slip embossing				
BKBGDR-RHP 20S	200 mm	2,00 mm	5 kN	R12	2,53 kg
incl.:					
1x BKGRDR-RHP 20S	floor duct cover, right with mitre cut and non-slip embossing				
1x BKGLDR-RHP 20S	floor duct cover, left with mitre cut and non-slip embossing				
BKBGDR-RHP 30S	300 mm	2,00 mm	5 kN	R12	4,10 kg
incl.:					
1x BKGRDR-RHP 30S	floor duct cover, right with mitre cut and non-slip embossing				
1x BKGLDR-RHP 30S	floor duct cover, left with mitre cut and non-slip embossing				
BKBGDR-RHP 40S	400 mm	2,00 mm	5 kN	R12	5,99 kg
incl.:					
1x BKGRDR-RHP 40S	floor duct cover, right with mitre cut and non-slip embossing				
1x BKGLDR-RHP 40S	floor duct cover, left with mitre cut and non-slip embossing				
BKBGDR-RHP 50S	500 mm	2,00 mm	5 kN	R12	8,19 kg
incl.:					
1x BKGRDR-RHP 50S	floor duct cover, right with mitre cut and non-slip embossing				
1x BKGLDR-RHP 50S	floor duct cover, left with mitre cut and non-slip embossing				


Page 1



Product	B	t	P_{max}	slip resistance class	G
BKBGDR-RHP 60S	600 mm	2,00 mm	5 kN	R12	10,7 kg
incl.:					
1x BKGRDR-RHP 60S	floor duct cover, right with mitre cut and non-slip embossing				
1x BKGLDR-RHP 60S	floor duct cover, left with mitre cut and non-slip embossing				

B: width
t: material thickness
 P_{max} : Maximum load
slip resistance class: slip resistance according to DIN 51130
G: weight

DETAILS / APPLICATIONS

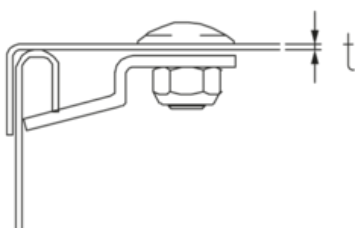

OPTIONAL ACCESSORIES

DR-BK, BKDU 100, BKDU 110

