


A 4

48x26 mm profile rail, unperforated

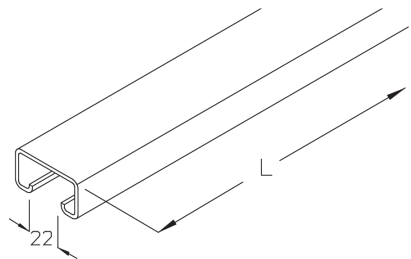



The profile rail A 4 is unperforated and consists of a C+ profile 48 x 26 mm with a slot width of 22 mm (material thickness = 2.5 mm). We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications. It is available in lengths of 3000 or 6000 mm.

Artikel	Typ	H _p	B _p	L	t	W
A 4-30B	Channel A 4-30B	26 mm	48 mm	3000 mm	2.50 mm	6.850 kg
A 4-60B	Channel A 4-60B	26 mm	48 mm	6000 mm	2.50 mm	13.500 kg

Artikel	Typ	H _p	B _p	L	t	W
A 4-60F	Channel A 4-60F	26 mm	48 mm	6000 mm	2.50 mm	12.800 kg
A 4-30F	Channel A 4-30F	26 mm	48 mm	3000 mm	2.50 mm	6.400 kg

DETAIL- UND ANWENDUNGSBILDER

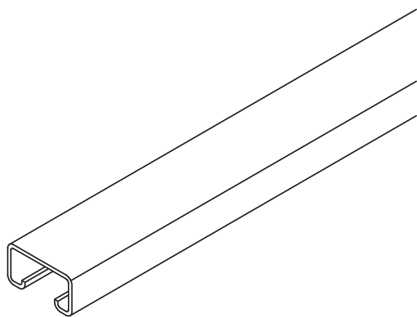



$$W_y = 1.76 \text{ cm}^3$$

$$W_z = 3.85 \text{ cm}^3$$

$$I_y = 2.64 \text{ cm}^4$$

$$I_z = 9.23 \text{ cm}^4$$

OPTIONALES ZUBEHÖR

HS22, ASK 4

