


BKA 110


Floor duct branch, height = 110 mm




The floor duct branch BKA 110 with integrated connectors allows the direction of cable routing to be changed horizontally by 90°. It is 110 mm high and 100 to 600 mm wide. It is made of sendzimir hot-dip galvanised steel. To dissipate vertical live loads, one separating strip must be installed in the floor duct for widths ≥ 300 mm and two separating strips for widths ≥ 500 mm. The branch is inserted between two floor ducts. The branching floor duct can then be pushed in.

Artikel	Typ	H	B	t	W	W
BKA 110-10S	Floor duct branch, 90° T piece,	110 mm	100 mm	2.00 mm	90°	2.934 kg
BKA 110-15S	Floor duct branch, 90° T piece,	110 mm	150 mm	2.00 mm	90°	3.384 kg
BKA 110-20S	Floor duct branch, 90° T piece,	110 mm	200 mm	2.00 mm	90°	3.894 kg
BKA 110-30S	Floor duct branch, 90° T piece,	110 mm	300 mm	2.00 mm	90°	5.144 kg
BKA 110-40S	Floor duct branch, 90° T piece,	110 mm	400 mm	2.00 mm	90°	6.754 kg
BKA 110-50S	Floor duct branch, 90° T piece,	110 mm	500 mm	2.00 mm	90°	8.624 kg
BKA 110-60S	Floor duct branch, 90° T piece,	110 mm	600 mm	2.00 mm	90°	10.844 kg

DETAIL- UND ANWENDUNGSBILDER

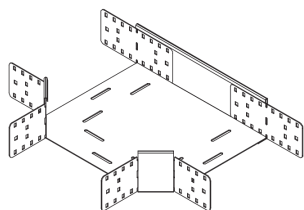

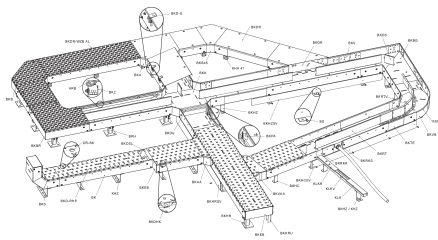

OPTIONALES ZUBEHÖR

BKADR, BKADR-RHP, BKADR-WZB AL, BKRTV 110, BKDS 110

