


## BKTE 110

Floor duct telescopic insert, height = 110 mm

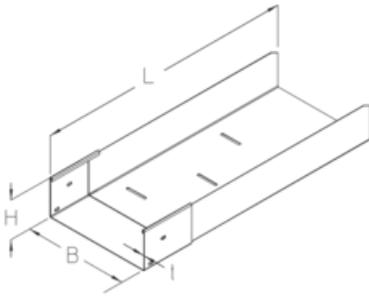

The floor duct telescopic insert BKTE 110 ensures full flexibility during assembly. Its length can be continuously adjusted between 150 and 650 mm allowing two floor ducts to be variably connected without requiring any cutting work. The telescopic insert is pushed into the existing channel by at least 50 mm on one side. The perforated side of the telescopic insert can be bolted together with the BKV connectors. Subsequent changes can be made to the system with very little effort. The floor duct telescopic insert is available in sendzimir hot-dip galvanised steel. The sides are 110 mm high and it is 100 to 600 mm wide. The total length is 700 mm.

Steel, pre-galvanised/Senzimir process

Article	Type	H	B	L	t	G
BKTE 110-700-10S	Floor duct telescopic insert	110 mm	100 mm	700 mm	1.50 mm	2.800 kg
BKTE 110-700-15S	Floor duct telescopic insert	110 mm	150 mm	700 mm	1.50 mm	3.260 kg
BKTE 110-700-20S	Floor duct telescopic insert	110 mm	200 mm	700 mm	1.50 mm	3.720 kg
BKTE 110-700-30S	Floor duct telescopic insert	110 mm	300 mm	700 mm	1.50 mm	4.640 kg
BKTE 110-700-40S	Floor duct telescopic insert	110 mm	400 mm	700 mm	1.50 mm	5.550 kg
BKTE 110-700-50S	Floor duct telescopic insert	110 mm	500 mm	700 mm	1.50 mm	6.460 kg
BKTE 110-700-60S	Floor duct telescopic insert	110 mm	600 mm	700 mm	1.50 mm	7.470 kg

**H:** height

**B:** width

**L:** length

**t:** material thickness




**G:** Weight per storage unit



# PRODUCT INFORMATION

---

## DETAIL AND APPLICATION IMAGES

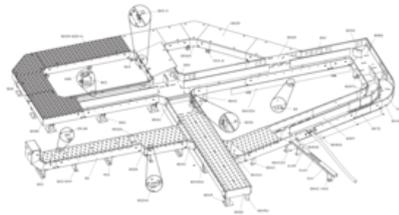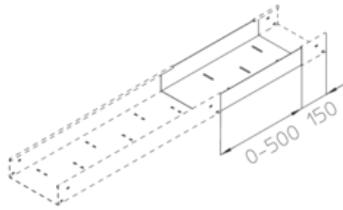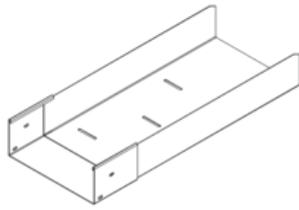

## OPTIONAL ACCESSORIES

BKDR, BKD-RHP, BKDR-WZB AL, BKV 110, BKRT 110, BKRTV 110, BKEB 110

