


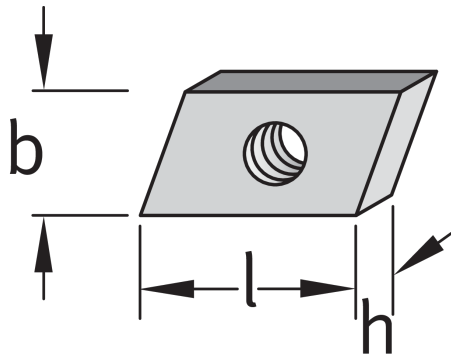

## JGM D

Hammer-head locking plate, threaded plate for spaced mounting

JGM D hammer-head locking plates are threaded plates that are inserted at any point of the corresponding anchor or mounting channel. The threaded hole is centred by turning it 90° after insertion. Locking plates are used for spaced mounting with long bolts or threaded rods. When screwing in the threaded rod, the locking plates tilt and create an efficient connection without requiring additional locking. JGM D hammer-head locking plates are available in galvanised steel or stainless steel (A4) and in various threads to fit numerous rails. They fit many cold-formed rails and channels.

| Artikel  | Typ                         | H    | B     | L     | MT  | W        |
|----------|-----------------------------|------|-------|-------|-----|----------|
| GFD10 GV | JORDAHL locking plate D M10 | 6 mm | 14 mm | 18 mm | M10 | 0.010 kg |
| GFD4 A4  | JORDAHL locking plate D M4  | 4 mm | 12 mm | 21 mm | M4  | 0.008 kg |
| GFD4 GV  | JORDAHL locking plate D M4  | 4 mm | 12 mm | 21 mm | M4  | 0.008 kg |
| GFD5 A4  | JORDAHL locking plate D M5  | 4 mm | 12 mm | 21 mm | M5  | 0.008 kg |
| GFD5 GV  | JORDAHL locking plate D M5  | 4 mm | 12 mm | 21 mm | M5  | 0.008 kg |
| GFD6 A4  | JORDAHL locking plate D M6  | 4 mm | 12 mm | 21 mm | M6  | 0.007 kg |
| GFD6 GV  | JORDAHL locking plate D M6  | 4 mm | 12 mm | 21 mm | M6  | 0.007 kg |
| GFD8 A4  | JORDAHL locking plate D M8  | 6 mm | 12 mm | 21 mm | M8  | 0.011 kg |
| GFD8 GV  | JORDAHL locking plate D M8  | 6 mm | 12 mm | 21 mm | M8  | 0.011 kg |
| GFD10 A4 | JORDAHL locking plate D M10 | 6 mm | 14 mm | 18 mm | M10 | 0.010 kg |

## DETAIL- UND ANWENDUNGSBILDER



