


RDD

Cable tray cover, roof-shaped

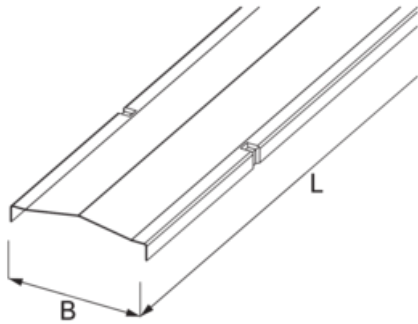

The RDD cable tray covers, with a 10° angle of inclination, are suitable for all cable trays. They are secured to the cable tray using storm-proof brackets. The cover is available in widths from 100 to 600 mm and has a standard length of 3000 mm. Versions in 1.4301 (V2A) and 1.4404/1.4571 (V4A) are available on request.

Steel, pre-galvanised/Sendzimir process

Article	B	L	t	G
RDD 10S Tapered cover	104 mm	3000 mm	0.75 mm	2.611 kg
RDD 20S Tapered cover	204 mm	3000 mm	0.75 mm	4.404 kg
RDD 30S Tapered cover	304 mm	3000 mm	1.00 mm	8.155 kg
RDD 40S Tapered cover	404 mm	3000 mm	1.00 mm	10.558 kg
RDD 50S Tapered cover	504 mm	3000 mm	1.25 mm	16.114 kg
RDD 60S Tapered cover	604 mm	3000 mm	1.25 mm	19.103 kg

Steel, hot-dip galvanised

Article	B	L	t	G
RDD 10F Tapered cover	104 mm	3000 mm	0.75 mm	2.781 kg
RDD 20F Tapered cover	204 mm	3000 mm	0.75 mm	4.699 kg
RDD 30F Tapered cover	304 mm	3000 mm	1.00 mm	8.713 kg
RDD 40F Tapered cover	404 mm	3000 mm	1.00 mm	11.284 kg
RDD 50F Tapered cover	504 mm	3000 mm	1.25 mm	17.230 kg



PRODUCT INFORMATION

Article	B	L	t	G
RDD 60F Tapered cover	604 mm	3000 mm	1.25 mm	20.428 kg

B: width
L: length
t: material thickness
G: Weight per storage unit



DETAIL AND APPLICATION IMAGES

