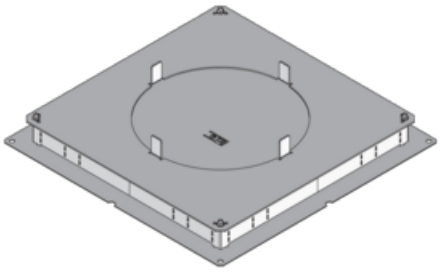

# UBDHB350 2R

## Screed junction box hollow space, 2x, round

The UBDHB350 2R components are false screed junction boxes that are installed as pull boxes and built-in boxes on screed-covered underfloor ducts. They have a mounting hole to accommodate a formwork pipe, which is replaced by a round plastic or stainless steel installation unit during final assembly. The supplied earthing clamps are used for equipotential bonding. The screed junction boxes with side walls that can be bent open on all sides are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346 and have VDE approval in accordance with DIN EN 50085-2-2.

VDE tested according to: DIN EN 50085-2-2

CE-Zeichen (Conformité Européenne): Ja

VDE-zertifiziert: Ja

| Article | H | $H_{min}$ | B1 | B2 | L1 | L2 | mounting box | E | Produktstatus | G |
|---|---|---|---|---|---|---|---|---|---|---|
| **UBDHB350 28-259R** Screed junction box hollow space, | 31 mm | 63 mm | 410 mm | 450 mm | 410 mm | 450 mm | 2 | 260 mm | Auslaufartikel | 3.314 kg |
| **UBDHB350 38-259R** Screed junction box hollow space, | 41 mm | 73 mm | 410 mm | 450 mm | 410 mm | 450 mm | 2 | 260 mm | Auslaufartikel | 3.406 kg |
| **UBDHB350 48-259R** Screed junction box hollow space, | 51 mm | 83 mm | 410 mm | 450 mm | 410 mm | 450 mm | 2 | 260 mm | Auslaufartikel | 3.502 kg |

**H:** height
**$H_{min}$:** minimum installation height
**B1:** width 1
**B2:** width 2
**L1:** length 1
**L2:** length 2
**mounting box:** maximum number of installable device casings
**E:** fitting dimension
**G:** Weight per storage unit



PohlCon

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved

## DETAIL AND APPLICATION IMAGES

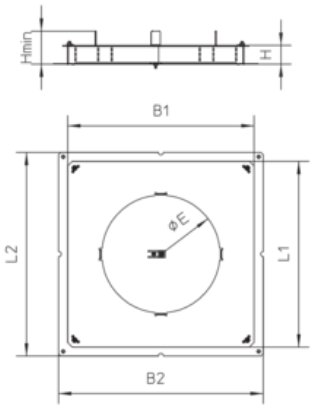


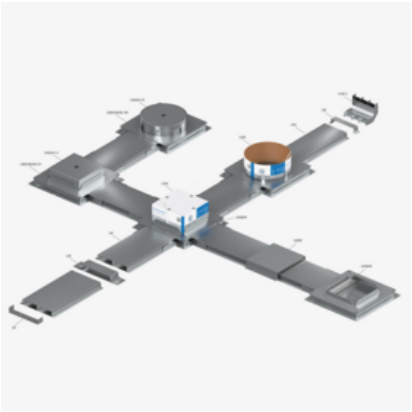

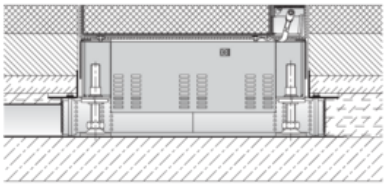

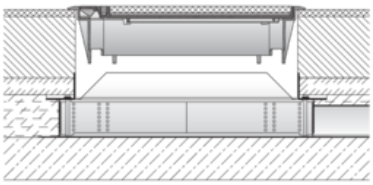

## OPTIONAL ACCESSORIES

USR, UN



PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved