


UEBSBD

Dummy cartridge, angular




UEBSBD components are square dummy cartridges that are mounted with their abutting edges on the side walls of screed-flush duct systems. They can alternatively be used with dummy covers in rooms with office traffic loads. The cartridges are made of stainless steel with chrome and nickel alloys (material no. 1.4301, V2A) and have VDE approval according to DIN EN 50085. They are 500 mm long and the material is 3 mm thick. They are available in two different height and depth dimensions and are from 194 mm wide.

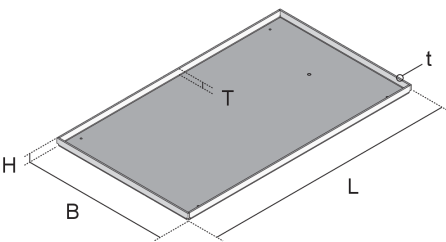

Artikel	Typ	H	B	L	t	T	W
UEBSBD 15-20E	dummy cartridge,	15 mm	200 mm	500 mm	3.00 mm	12 mm	2.677 kg
UEBSBD 15-30E	dummy cartridge,	15 mm	300 mm	500 mm	3.00 mm	12 mm	3.916 kg
UEBSBD 15-40E	dummy cartridge,	15 mm	400 mm	500 mm	3.00 mm	12 mm	5.155 kg
UEBSBD 15-50E	dummy cartridge,	15 mm	500 mm	500 mm	3.00 mm	12 mm	6.390 kg
UEBSBD 25-20E	dummy cartridge,	25 mm	200 mm	500 mm	3.00 mm	22 mm	3.003 kg
UEBSBD 25-30E	dummy cartridge,	25 mm	300 mm	500 mm	3.00 mm	22 mm	4.289 kg
UEBSBD 25-40E	dummy cartridge,	25 mm	400 mm	500 mm	3.00 mm	22 mm	5.576 kg
UEBSBD 25-50E	dummy cartridge,	25 mm	500 mm	500 mm	3.00 mm	22 mm	6.861 kg

DETAIL- UND ANWENDUNGSBILDER

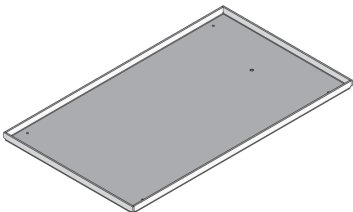

DIN

Load requirements according to: DIN EN 50085

