




UEKDD R E



Stainless steel hinged cover cartridge, 3x, round

UEKDD R E products are round hinged cover cartridges for gradually lowering up to three mounting boxes by max. 30 mm. The installation units consist of a carpet protection frame with snap-in ladders, a hinged cover with floor-level cable outlet, UGD-R rubber seal and universal claw set UDBS 40-80. They are designed for dry-cleaned or damp-cleaned rooms with office traffic loads and are used in floor sockets, assembly covers and raised or false floor openings. The cartridges are made of stainless steel V2A and have an IP protection class of IP 30 in an unused condition, an IP protection class of IP 20 when used, an installation dimension of 307 mm and a maximum load capacity of 2 kN.

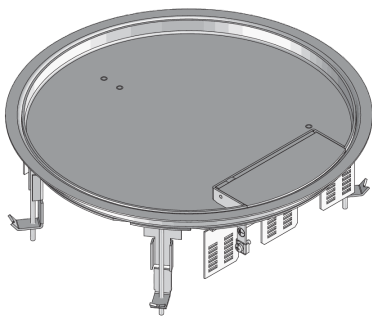

Artikel	Typ	H	H _{min}	B	P _{max}	mounting box	E	IP _g	IP _n	T	W
UEKDD 15-R E	cartridge installation unit,	75 mm	90 mm	330 mm	2.00 kN	3	307 mm	IP 20	IP 30	12 mm	2.519 kg
UEKDD 25-R E	cartridge installation unit,	85 mm	100 mm	330 mm	2.00 kN	3	307 mm	IP 20	IP 30	22 mm	2.821 kg

DETAIL- UND ANWENDUNGSBILDER

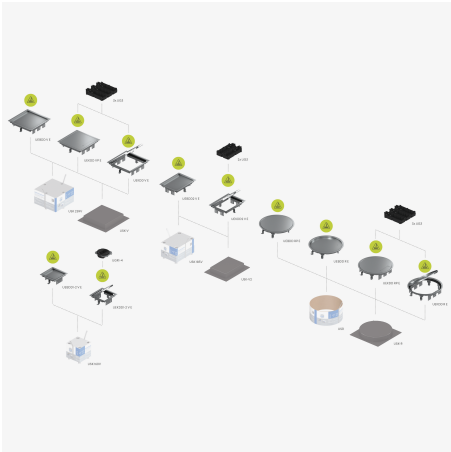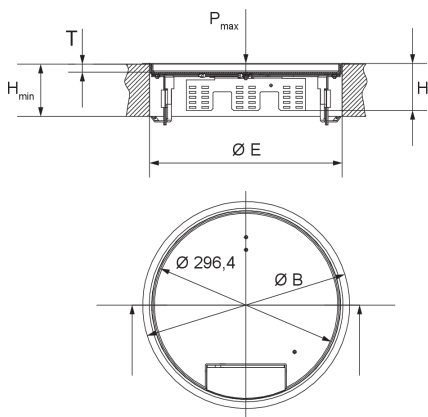

OPTIONALES ZUBEHÖR

UEKDE R

DIN

Load requirements according to: DIN EN 50085

