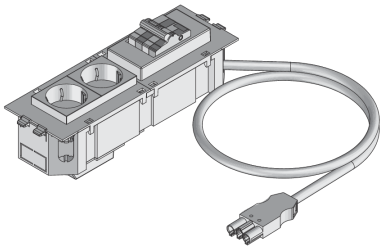

UGWIS-FILS6A

Mounting box pre-assembled with RCCB switch, 6 A, Wieland

UGWIS-FILS6A components are pre-assembled mounting boxes with a type 6 KA, 1 p?+?N, 6 A/30 mA residual current circuit breaker (RCCB). The mounting boxes are connected with a 2000 to 3000 mm long connecting cable with a 2.5 mm² cable cross-section and a 3-pin Wieland plug. They are completed by the addition of a 3-pin Wieland device socket under the mounting box and a 2-way socket. They are made of ABS copolymer.

Artikel	Typ	H	B	L	connection cable	Farbe Snap-in	KQ	W
UGWIS-O2FILS6A-200	device cup pre-assembled	46 mm	74 mm	225 mm	2000 mm	weiß	2.5 mm^2	0.831 kg
UGWIS-O2FILS6A-300	device cup pre-assembled	46 mm	74 mm	225 mm	3000 mm	weiß	2.5 mm^2	0.981 kg
UGWIS-W2FILS6A-200	device cup pre-assembled	46 mm	74 mm	225 mm	2000 mm	schwarz	2.5 mm^2	0.831 kg
UGWIS-W2FILS6A-300	device cup pre-assembled	46 mm	74 mm	225 mm	3000 mm	schwarz	2.5 mm^2	0.981 kg

DETAIL- UND ANWENDUNGSBILDER

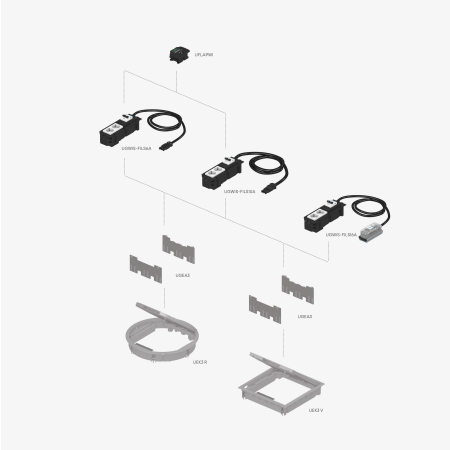

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Ausgabedatum: 21.05.2025. Irrtümer und technische Änderungen vorbehalten

OPTIONALES ZUBEHÖR

UFLAPWI

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Ausgabedatum: 21.05.2025. Irrtümer und technische Änderungen vorbehalten