


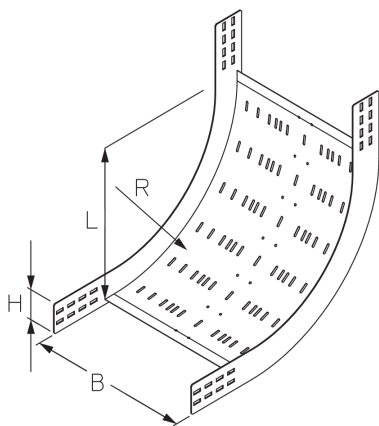

WPRS 120


Wide-span cable tray riser, height=120 mm

The wide-span cable tray riser WPRS 120 with integrated connectors allows the direction of cable routing to be changed vertically by 90° upwards. It is suitable for wide-span cable trays with rails 120 mm high and is 200 to 600 mm wide. The riser is pushed into the wide-span cable tray and then bolted in place. The connecting cable tray is then mounted on the riser. It has a radius of 545 mm.

Artikel	Typ	H	H _H	B	L	R	direction	W	W
WPRS 120-20F	Wide-span cable tray riser	120 mm	120 mm	200 mm	585 mm	545 mm	vertically rising	90°	9.540 kg
WPRS 120-30F	Wide-span cable tray riser	120 mm	120 mm	300 mm	585 mm	545 mm	vertically rising	90°	10.290 kg
WPRS 120-40F	Wide-span cable tray riser	120 mm	120 mm	400 mm	585 mm	545 mm	vertically rising	90°	11.050 kg
WPRS 120-50F	Wide-span cable tray riser	120 mm	120 mm	500 mm	585 mm	545 mm	vertically rising	90°	11.810 kg
WPRS 120-60F	Wide-span cable tray riser	120 mm	120 mm	600 mm	585 mm	545 mm	vertically rising	90°	12.580 kg

DETAIL- UND ANWENDUNGSBILDER



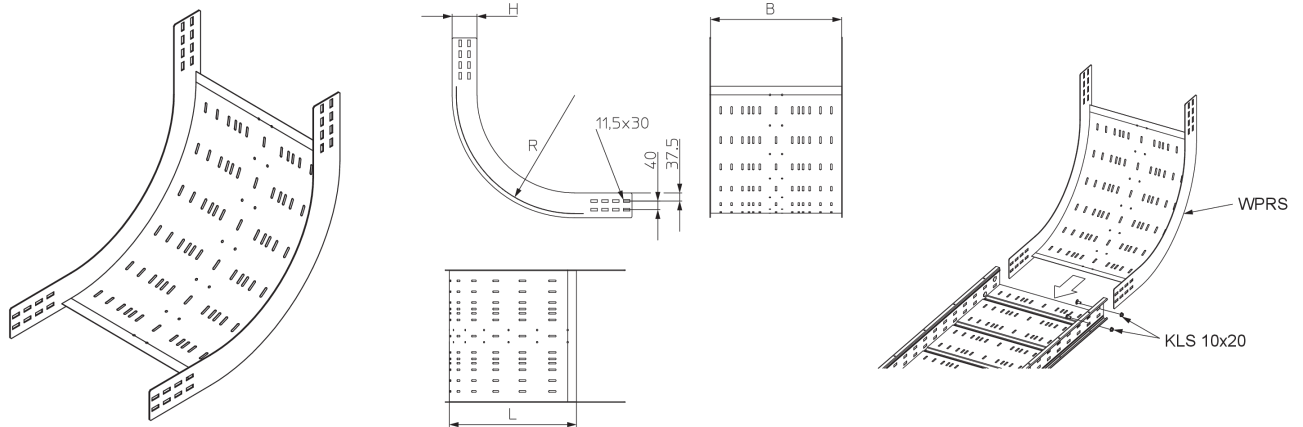

OPTIONALES ZUBEHÖR

WPSD

