


BKBG 110

Floor duct with mitre cut, height = 110 mm

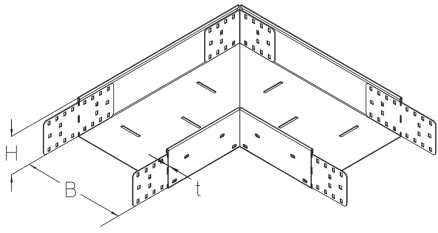

The floor duct bend BKBG 110 with integrated connectors and mitre cut allows the direction of cable routing to be changed horizontally by 90°. It is 110 mm high and 100 to 600 mm wide. It is made of sendzimir hot-dip galvanized steel. To dissipate vertical live loads, one separating strip must be installed in the floor duct for widths ≥ 300 mm and two separating strips for widths ≥ 500 mm. The bend is pushed into the floor ducts and then bolted in place.

steel, continuously hot galvanized/Sendzimir process

Products	H	B	t			weight
BKBG 110-10S	110 mm	100 mm	2,00 mm	90 °	HORIZONTAL	5,054 kg
incl.:						
4 x BKV 110S, 2 x BKV90 110S, 1 x BKGR 110-10S, 1 x BKGL 110-10S, 12 x KLR						
BKBG 110-15S	110 mm	150 mm	2,00 mm	90 °	HORIZONTAL	5,794 kg
incl.:						
1 x BKGR 110-15S, 1 x BKGL 110-15S, 12 x KLR, 4 x BKV 110S, 2 x BKV90 110S						
BKBG 110-20S	110 mm	200 mm	2,00 mm	90 °	HORIZONTAL	6,614 kg
incl.:						
1 x BKGR 110-20S, 1 x BKGL 110-20S, 12 x KLR, 4 x BKV 110S, 2 x BKV90 110S						
BKBG 110-30S	110 mm	300 mm	2,00 mm	90 °	HORIZONTAL	8,494 kg
incl.:						
2 x BKV90 110S, 1 x BKGR 110-30S, 1 x BKGL 110-30S, 12 x KLR, 4 x BKV 110S						
BKBG 110-40S	110 mm	400 mm	2,00 mm	90 °	HORIZONTAL	10,714 kg
incl.:						
1 x BKGR 110-40S, 1 x BKGL 110-40S, 12 x KLR, 4 x BKV 110S, 2 x BKV90 110S						
BKBG 110-50S	110 mm	500 mm	2,00 mm	90 °	HORIZONTAL	13,274 kg
incl.:						
1 x BKGR 110-50S, 1 x BKGL 110-50S, 12 x KLR, 4 x BKV 110S, 2 x BKV90 110S						
BKBG 110-60S	110 mm	600 mm	2,00 mm	90 °	HORIZONTAL	16,014 kg
incl.:						
1 x BKGR 110-60S, 1 x BKGL 110-60S, 12 x KLR, 4 x BKV 110S, 2 x BKV90 110S						





Page 1



PRODUCT INFORMATION

H: height
B: width
t: material thickness

DETAIL AND APPLICATION IMAGES

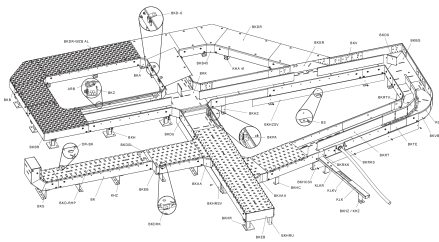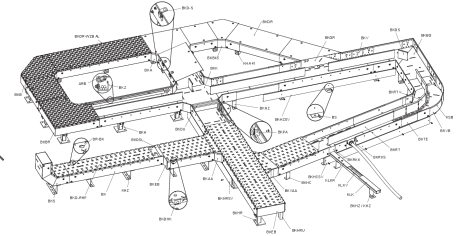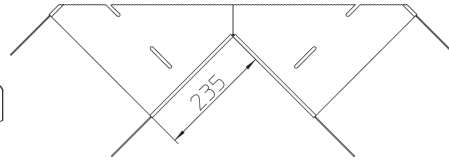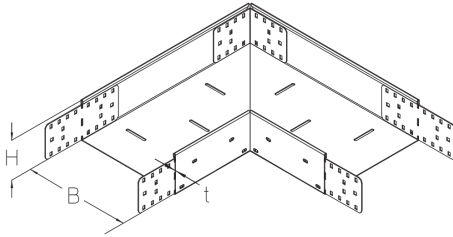

OPTIONAL ACCESSORIES

BKBGDR, BKBGDR-RHP, BKBGDR-WZB AL, BKRTV 110, BKDS 110

