


## WPRAA 120

Wide-span cable tray attachment branch, height = 120 mm

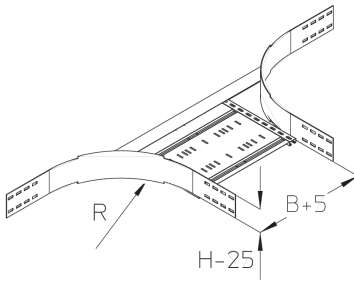

The wide-span cable tray attachment branch WPRAA 120 with integrated side connectors enables the direction of cable routing to be changed in the form of a branch. It is suitable for wide-span cable trays with rails 120 mm high and is 200 to 600 mm side. The side rail of the main tray is cut out at the point where the connecting tray will branch off. The WPRAA attachment branch is positioned and bolted in place at this point. The connection tray can then be pushed in with a VB floor connector. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, batch/hot-dip galvanized

Products	H	B	L	R	weight
WPRAA 120-20F	120 mm	200 mm	1630 mm	450 mm	9,820 kg
incl.:					
8 × FRSV 10X20F, 8 × SEM 10F, 8 × US 10X21F					
WPRAA 120-30F	120 mm	300 mm	1730 mm	450 mm	10,370 kg
incl.:					
8 × FRSV 10X20F, 8 × SEM 10F, 8 × US 10X21F					
WPRAA 120-40F	120 mm	400 mm	1830 mm	450 mm	10,910 kg
incl.:					
8 × FRSV 10X20F, 8 × SEM 10F, 8 × US 10X21F					
WPRAA 120-50F	120 mm	500 mm	1930 mm	450 mm	11,450 kg
incl.:					
8 × SEM 10F, 8 × US 10X21F, 8 × FRSV 10X20F					
WPRAA 120-60F	120 mm	600 mm	2030 mm	450 mm	11,990 kg
incl.:					
8 × FRSV 10X20F, 8 × SEM 10F, 8 × US 10X21F					


**H:** height  
**B:** width  
**L:** length  
**R:** radius



# PRODUCT INFORMATION

---

## DETAIL AND APPLICATION IMAGES

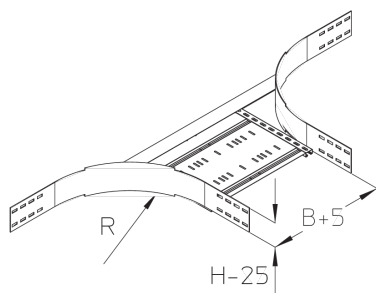

## OPTIONAL ACCESSORIES

WPAD, WPTRV 120

