


## KHB 7

profile rail 30x15 mm, perforated

profile rail 30x15x1.50 mm, with continuous perforation 9x35, slot size 16 mm

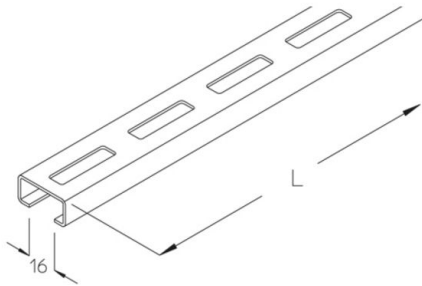

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	G
KHB 7-30S	15 mm	30 mm	3000 mm	1,50 mm	2,1 kg
KHB 7-60S	15 mm	30 mm	6000 mm	1,50 mm	4,2 kg

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHB 7-30F	15 mm	30 mm	3000 mm	1,50 mm	2,3 kg
KHB 7-60F	15 mm	30 mm	6000 mm	1,50 mm	4,6 kg

### Stainless steel, according to ASTM 304 / BS 304 S 3



Product	H	B	L	t	G
KHB 7-20E	15 mm	30 mm	2000 mm	1,50 mm	1,34 kg
KHB 7-30E	15 mm	30 mm	3000 mm	1,50 mm	2,2 kg
KHB 7-60E	15 mm	30 mm	6000 mm	1,50 mm	4,4 kg

**H:** height  
**B:** width  
**L:** length



t: material thickness  
G: weight

## DETAILS / APPLICATIONS

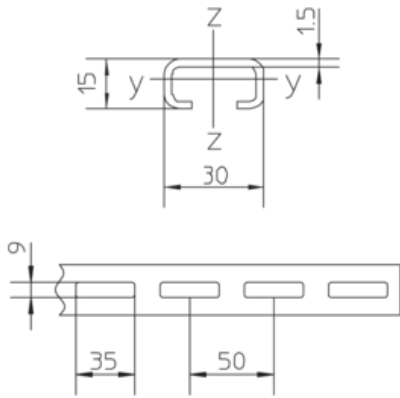

$$\begin{aligned}W_y &= 0.30 \text{ cm}^3 \\W_z &= 0.83 \text{ cm}^3 \\I_y &= 0.25 \text{ cm}^4 \\I_z &= 1.25 \text{ cm}^4\end{aligned}$$

## OPTIONAL ACCESSORIES

HS16, AM16

