


## UBDHB 122R

hollow space floor box, single, round



Hollow space floor box, consisting of a Sendzimir hot-dip galvanized sheet steel box; all sides can be bent open; including earthing clamp, for subsonic noise-free and height-independent mounting. Can be used as pull or installation box, with a mounting opening as a collet for a shuttering unit that is replaced with a single outlet BODO during final assembly.

material	sheet steel, hot-dip galvanized
type of assembly	Mounting on raw concrete ceiling
application area	screed-covered duct system for tubes M 20 / M 16
permits	according to VDE / TÜV
norm	according to DIN EN 50085

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	H <sub>min</sub>	B1	B2	L1	L2	E	mounting box	G
UBDHB 38-122R	42 mm	73 mm	150 mm	160 mm	150 mm	160 mm	123 mm	single	0,64 kg
incl.:									
1x UBDHB-Z	grounding clamp								

**H:** height

**H<sub>min</sub>:** Minimum installation height

**B1:** width

**B2:** width

**L1:** length 1

**L2:** length 2


**E:** fitting dimension

**mounting box:** Maximum number of installable device casings.

**G:** weight



## DETAILS / APPLICATIONS

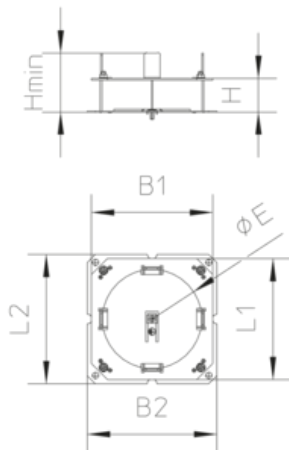

## OPTIONAL ACCESSORIES

USKR, UN

