


## WLRB 200

Wide span cable tray bend, height = 200 mm

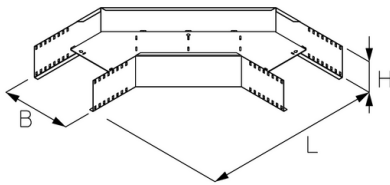

The WLRB 200 wide span cable tray bends with integrated connectors allow horizontal directional changes of cable routing by 90°. They are suitable for WLR 200 wide span cable trays and have widths from 200 to 600 mm. The bend is inserted into the wide span cable tray with a VB floor connector and screwed in place. The connection trough is then mounted on the bend. Different materials and surfaces ensure that the corrosion protection requirements of a wide variety of applications are met.

- Allows horizontal change of direction of the cable guide by 90°
- Cable gentle guidance

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Product	H	B	L	G
WLRB 20F	203,5 mm	200 mm	952 mm	18,15 kg
incl.:				
5x FRSV 6X12E		round-head screw with short square, DIN 603		
5x SEMS 6E		hexagon-nut with flange, DIN EN 1661		
16x SEM 10F		hexagon-nut, DIN 934		
16x FRSV 10X20F		round-head screw with short square, DIN 603		
16x US 10X21F		washer, DIN EN ISO 7089		
WLRB 30F	203,5 mm	300 mm	1052 mm	20,33 kg
incl.:				
5x FRSV 6X12E		round-head screw with short square, DIN 603		
5x SEMS 6E		hexagon-nut with flange, DIN EN 1661		
16x SEM 10F		hexagon-nut, DIN 934		
16x FRSV 10X20F		round-head screw with short square, DIN 603		
16x US 10X21F		washer, DIN EN ISO 7089		
WLRB 40F	203,5 mm	400 mm	1152 mm	22,13 kg
incl.:				
5x FRSV 6X12E		round-head screw with short square, DIN 603		
5x SEMS 6E		hexagon-nut with flange, DIN EN 1661		
16x SEM 10F		hexagon-nut, DIN 934		
16x FRSV 10X20F		round-head screw with short square, DIN 603		
16x US 10X21F		washer, DIN EN ISO 7089		
WLRB 50F	203,5 mm	500 mm	1252 mm	24,42 kg



Product	H	B	L	G
incl.: 5x SEMS 6E 16x SEM 10F 16x FRSV 10X20F 16x US 10X21F 5x FRSV 6X12E				
		hexagon-nut with flange, DIN EN 1661 hexagon-nut, DIN 934 round-head screw with short square, DIN 603 washer, DIN EN ISO 7089 round-head screw with short square, DIN 603		
WLRB 60F	203,5 mm	600 mm	1352 mm	26,81 kg
incl.: 5x FRSV 6X12E 5x SEMS 6E 16x SEM 10F 16x FRSV 10X20F 16x US 10X21F				
		round-head screw with short square, DIN 603 hexagon-nut with flange, DIN EN 1661 hexagon-nut, DIN 934 round-head screw with short square, DIN 603 washer, DIN EN ISO 7089		

**H:** height  
**B:** width  
**L:** length  
**G:** weight

## DETAILS / APPLICATIONS



## OPTIONAL ACCESSORIES

WLBD, WLBDR, EBW, WTRV 200

