


KHA 7

Profilschiene 39,5x22 mm, gelocht, Funktionserhalt

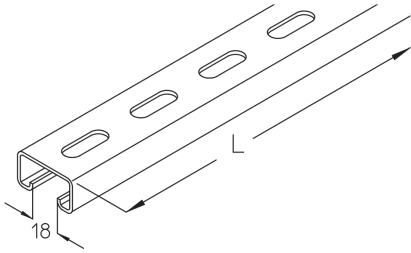

Stahl, band-/sendzimirverzinkt

Artikel	L	H _p	B _p	t	G
KHA 7-02S	200 mm	22 mm	39,5 mm	1,50 mm	0,210 kg
KHA 7-03S	300 mm	22 mm	39,5 mm	1,50 mm	0,310 kg
KHA 7-04S	400 mm	22 mm	39,5 mm	1,50 mm	0,410 kg
KHA 7-05S	500 mm	22 mm	39,5 mm	1,50 mm	0,510 kg
KHA 7-06S	600 mm	22 mm	39,5 mm	1,50 mm	0,610 kg
KHA 7-07S	700 mm	22 mm	39,5 mm	1,50 mm	0,780 kg
KHA 7-08S	800 mm	22 mm	39,5 mm	1,50 mm	0,834 kg
KHA 7-09S	900 mm	22 mm	39,5 mm	1,50 mm	1,000 kg
KHA 7-10S	1000 mm	22 mm	39,5 mm	1,50 mm	1,050 kg
KHA 7-11S	1100 mm	22 mm	39,5 mm	1,50 mm	1,150 kg
KHA 7-12S	1200 mm	22 mm	39,5 mm	1,50 mm	1,260 kg
KHA 7-13S	1300 mm	22 mm	39,5 mm	1,50 mm	1,360 kg
KHA 7-14S	1400 mm	22 mm	39,5 mm	1,50 mm	1,470 kg
KHA 7-15S	1500 mm	22 mm	39,5 mm	1,50 mm	1,570 kg
KHA 7-20S	2000 mm	22 mm	39,5 mm	1,50 mm	2,200 kg
KHA 7-30S	3000 mm	22 mm	39,5 mm	1,50 mm	3,200 kg
KHA 7-60S	6000 mm	22 mm	39,5 mm	1,50 mm	6,300 kg

L: Länge
H_p: Profilhöhe



Seite 1




PRODUKTINFORMATION

B_p: Profilbreite
t: Materialstärke
G: Gewicht je Lagereinheit

DETAIL- UND ANWENDUNGSBILDER

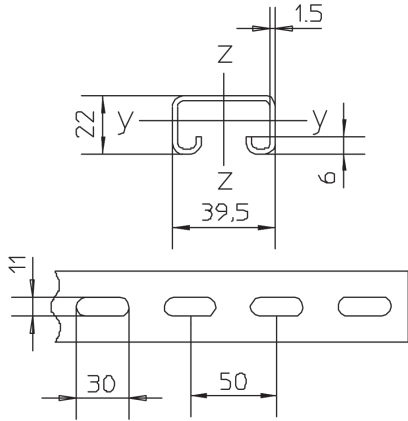

$$\begin{aligned}W_y &= 0.80 \text{ cm}^3 \\W_z &= 1.69 \text{ cm}^3 \\I_y &= 0.91 \text{ cm}^4 \\I_z &= 3.34 \text{ cm}^4\end{aligned}$$

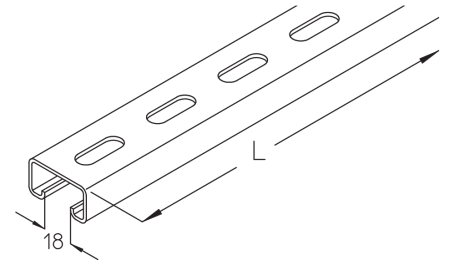

OPTIONALES ZUBEHÖR

ASK 8, AC

